



Development Draft Document for Proposed Effluent Limitations Guidelines and Standards for the Shipbuilding and Repair


Point Source Category

JUN 25 1984

DEPARTMENT OF ECOLOGY Property of
NORTHWEST U.S. Environmental Protection Agency
Library Region x

APR 8 1981

1200 Sixth Avenue
Seattle, WA 98101

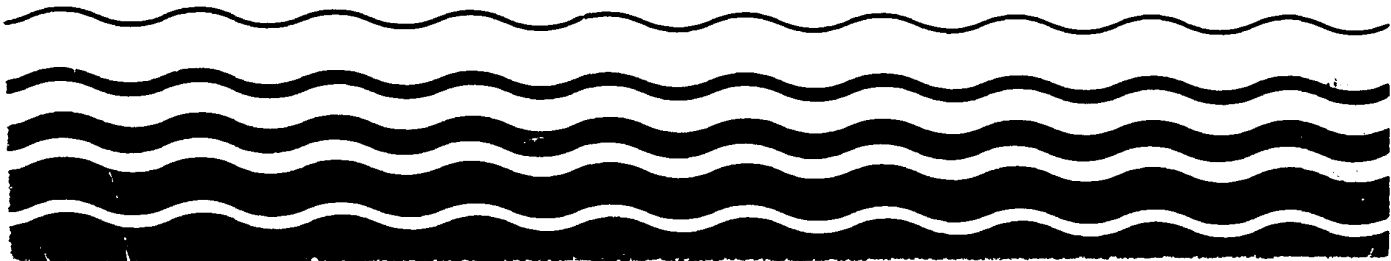

DEVELOPMENT DOCUMENT
FOR
PROPOSED BEST MANAGEMENT PRACTICES

for the

SHIPBUILDING AND REPAIR INDUSTRY:
DRYDOCKS
POINT SOURCE CATEGORY

Douglas M. Costle
Administrator

Sweep T. Davis
Acting Assistant Administrator
for Water and Hazardous Materials

Albert J. Erickson
Acting Deputy Assistant Administrator
for Water Planning and Standards



Robert B. Schaffer
Director, Effluent Guidelines Division

Ernst P. Hall, P.E.
Chief, Metals & Machinery Branch

John Penn Whitescarver
Project Officer

December, 1979

Effluent Guidelines Division
Office of Water and Hazardous Materials
U.S. Environmental Protection Agency
Washington, D.C. 20460

DRAFT

ABSTRACT

This document presents the findings of an extensive study of the shipbuilding and repair industry. Its purpose is to provide specific guidance for the development of discharge permits to be issued under the authority of Section 402 of the Federal Water Pollution Control Act as amended. These permits are issued by state and federal authorities participating in the National Pollutant Discharge Elimination System (NPDES).

The studies conducted by the Environmental Protection Agency (EPA) determined that the imposition of national industry-wide numerical limitations and standards is impractical at this time. This document, therefore, provides guidance which recommends specific best management practices. Such management practices should be tailored to specific facilities. This determination shall in no way restrict the use of numerical limitations in NPDES permits.

The best management practices identified in this document shall be guidance for the determination of best practicable control technology currently available, best available control technology economically achievable, and best available demonstrated control technology. Supporting data and rationale are contained in this document.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
I	CONCLUSIONS	1
II	RECOMMENDATIONS	5
	BEST MANAGEMENT PRACTICES (BMP)	5
III	INDUSTPY CHARACTERIZATION	9
	BACKGROUND - THE CLEAN WATER ACT	10
	SUMMARY OF METHODS USED FOR DETERMINING THE PRACTICALITY OF EFFLUENT LIMITATIONS GUIDELINES AND STANDARDS OF PERFORMANCE	11
	GENERAL DESCRIPTION OF INDUSTRY	14
IV	INDUSTRY CATEGORIZATION	39
	INTRODUCTION	39
	INDUSTRY SUBCATEGORIZATION	39
	FACTORS CONSIDERED	39
V	WATER USE AND WASTE CHARACTERIZATION	41
	INTRODUCTION	41
	SPECIFIC WATER USES	44
	PROCESS WASTE CHARACTERIZATION	47
	QUANTITATIVE DATA	51
VI	SELECTION OF POLLUTION PARAMETERS	67
	INTRODUCTION	67
	RATIONALE FOR THE SELECTION OF POLLUTION PARAMETERS	69
	RATIONALE FOR REJECTION OF POLLUTION PARAMETERS	78
VII	TREATMENT AND CONTROL TECHNOLOGY	81

	INTRODUCTION	81
	BEST MANAGEMENT PRACTICES	83
	CURRENT TREATMENT AND CONTROL TECHNOLOGIES	85
	CONTROL AND TREATMENT OF WASTEWATER FLOWS	93
	TREATMENT AND CONTROL TECHNOLOGIES UNDER DEVELOPMENT OR NOT IN COMMON USE	94
	NON-WATER QUALITY ENVIRONMENTAL ASPECTS	98
VIII	COST OF TREATMENT AND CONTROL TECHNOLOGY	103
	INTRODUCTION	103
	IDENTIFICATION OF METHODOLOGY CURRENTLY USED IN BEST MANAGEMENT PRACTICES	104
	UNIT COSTS OF BEST MANAGEMENT PRACTICES	105
	COSTS ATTRIBUTED TO BEST MANAGEMENT PRACTICES vs ENVIRONMENTAL COSTS	116
IX	ACKNOWLEDGEMENTS	119
X	REFERENCE AND BIBLIOGRAPHY	121
	REFERENCES	121
	BIBLIOGRAPHY	123
XI	GLOSSARY	129

LIST OF FIGURES

<u>Number</u>	<u>Title</u>	<u>Page</u>
III-1	Typical Graving Dock	16
III-2	Typical Transverse Section of a Floating Drydock	19
III-3	Typical Inside and Outside Water Levels for Complete Docking Cycle of Floating Drydock	21
V-1	Major Flows Associated with Drydocked Vessel	42

LIST OF TABLES

<u>Number</u>	<u>Title</u>	<u>Page</u>
III-1	Summary of Shipyard Information Acquisition Program	13
III-2	Abrasive Blasting	24
III-3	Constituents of Abrasive Blast Material at Naval Shipyards	27
III-4	Compositions of Formula Paints	28
III-5	Compositions of Organotin Antifouling Paints	30
III-6	Location Factors	32
III-7	Utilization of Drydocking Facilities	35
III-8	Graving Dock Lengths and Water Volumes	37
V-1	Water and Wastewater Practices, Shipyards A through G	43
V-2	Summary of NDPES Monitoring at Shipyard A - August 1975 through September 1975	54
V-3	Summary of Shipyard Test Results of EPA/Shipyard Monitoring at GD #B-3 at Shipyard B - May 1974	55
V-4	Summary of EPA Testing of EPA/Shipyard Monitoring of GD #B-3 at Shipyard B - May 1974	56
V-5	Summary of NPDES Monitoring of Drainage Discharge of Shipyard B - February 1975 Through February 1976	57
V-6	Summary of Contractor's Monitoring at Shipyard B - April 1976	58
V-7	Summary of All Monitoring at Shipyard B	59

V-8	Summary of NPDES Monitoring of Drainage Discharges at Shipyard D - January 1975 through December 1975	60
V-9	Summary of Contractor's Monitoring of GD #D-3 Shipyard D - May 1976	61
V-10	Summary of All Harbor and Drainage Discharge Monitoring at Shipyard D	62
V-11	Grain-Size Analysis of Unspent Grit (Sample 1)	65
V-12	Grain-Size Analysis of Spent Grit and Spent Paint (Sample 2)	66
VI-1	Materials Originating from Drydocks which May be Discharged to Waterways	68
VI-2	Parameters Which May Be Present In Wastewater Discharges From Drydocks	69
VI-3	Pollution Parameters	71
VI-4	Parameters Rejected as Pollution Parameters	79
VII-1	Water Quality Treatment and Control Technologies Currently Being Used In Drydocks	86
VII-2	Water Quality Treatment and Control Technologies Under Development or Not Being Used in Drydocks	87
VII-3	Reported Application of the Treatment and Control Technologies	88
VIII-1	Unit Costs of Selected Operations Which May Be Used in Best Management Practices	107
VIII-2	Cost of Disposal of Solid Waste Removed From Docks (Includes Hauling and Landfill Fees)	108

SECTION I

CONCLUSIONS

An engineering evaluation of graving dock and floating drydock operations was conducted to determine potential for generation of pollutants from shipbuilding and repair operations. The practicability of establishing numerical effluent guidelines was evaluated. Current techniques employed by shipyards were evaluated with respect to practices which reduce constituent levels in discharges and with respect to variations in repair practices within the industry.

The conduct of the work involved contacts with thirty-eight shipyards, engineering visits with data collection in seven shipyards, and sampling during ship repair operations in two shipyards. Additionally, prior work conducted by the EPA, discharge data collected in response to NPDES discharge permit monitoring, and relevant literature prepared by the EPA, Navy, and private shipyards were evaluated.

This industry is such that numerical effluent limitations are impractical and difficult to apply in a manner which could be monitored; therefore, guidance is provided for controlling wastewater pollutant discharges which require that best management requirements be applied.

The quality of the water discharged from drydocks is highly dependent upon the process used for removal of paint, rust, and marine growths from the metal surfaces of ship hulls. These materials are found mixed in the spent blasting material. Rust and marine growth removed from the sides of the ship may increase quantities of solids in the waste stream.

Spent paint contains compounds of copper, zinc, chromium, tin and lead, as well as organotin compounds (References 5, 6, 8, and 15). Copper, Zinc, chromium, and lead have been identified as priority pollutants and as such, their discharge must be subject to control. The paint contributes to the solid load in the waste stream as well as coming in contact with stormwater, flooding waters, hosewater, and water spills. Additionally, it can be washed, pushed, or blown into uncovered drains or shore waters.

Antifouling paints are of particular concern. Toxic constituents, such as copper or organotin compounds are used in these paint formulations. Of special concern are the new organotin antifouling paints due to irritant and toxic effects of the paint.

The evaluation of literature, observations, and data leads to the following conclusions:

1. Segregation of water, except rainwater, from debris on drydock decks and removal of debris, spent paint and abrasive are the two most practical methods for reducing discharge of solids and wastewater.
2. Yards servicing freshwater vessels generally do not use abrasive blasting in preparing the hull for painting; therefore, some recommendations have been identified to be deleted for yards not using abrasive blasting.
3. Existing floating drydocks cannot be effectively monitored by normal sampling procedures because water drains from a rising dock through many scuppers, the ends, between pontoons, and through other openings.
4. On the basis of available sampling data, the type and the degree of activity occurring in the yards do not relate consistently to levels of pollutant constituents present in the wastewater.
5. Innovations such as closed-cycle blasting and vacuum equipment are currently in the development stage and show promise for increased productivity, reduction in airborne particulates, improved working conditions, and reduced abrasive blasting debris accumulations in drydocks.
6. Clean-up practices appear to enhance productivity by improving working conditions and allowing workers greater access to work areas.
7. Current regulations governing oil and grease spills are applicable to floating drydock and graving dock operations during flooding and deflooding.

The above conclusions are based upon data obtained during sampling at two facilities and similar data from other sources. Due to the nature of the facilities, sampling techniques are difficult to employ and estimates of the pollutant load had to take into account the processes occurring and the material balance. A complete material balance on the abrasive and spent blasting debris was considered and rejected because of inherent inaccuracies. Such factors as the unknown quantity of marine growth present on the hull, the unknown amount of paint to be removed, and uncontrollable introduction of rainwater and leakage into the abrasive blasting debris contribute to these inaccuracies. Further, dispersion of the material in the dock and possible inclusion of other forms of debris (for example, sediment and

marine organisms which enter during flooding and when the caissons are open) compound the problems associated with a material balance.

Shipyard practices strongly influence the amount of waste produced. Yards servicing only freshwater vessels produce no spent antifouling paints since antifoulants are not used on freshwater vessels. Freshwater vessels are rarely subjected to abrasive blasting and thus the spent primer paint and abrasive are not produced.

Shipyards servicing commercial oceangoing vessels remove paint, both antifouling and anticorrosive, to varying degrees depending on the desires of the vessel owner (Reference 5). Naval vessels are customarily stripped of paint to bare metal, whereas commercial vessels are stripped to bare metal only occasionally and more frequently only lightly sand blasted to prepare the surface to receive a coating of paint. Spent antifouling paint thus occurs in shipyards in different quantities.

Graving docks are subject to inflows of water which are not encountered with floating drydocks. Groundwater and gate leakage are the two major sources. Rainfall varies with climate but constitutes a third source. These inflows must be pumped from graving docks while rainfall can run off floating drydocks.

Leachability of spent paint is still an unresolved question. Primers containing lead oxide and zinc chromate do not appear to pose a leaching problem. Antifouling paints containing copper oxide may be leachable under some conditions, but factors such as amount of active material remaining, water pH, water temperature, water hardness, particle size, and contact time would appear to influence the amount of leaching if it occurs (References 5, 16, 17). Organotin paints may present hazards to workers during dry abrasive blasting. These paints are relatively new and little experience has been accumulated with them. Major unknowns with organotin paints are those of the extent of emission of tributyl-tin-oxide or tributyl-tin-fluoride (toxicants), the conversion of the organotin compounds to inorganic tin, and again, the actual leachability of the material. Formulations are prepared in differing concentrations depending upon the owners' specifications and the expected life of the protective coating.

Finally, it is concluded that a number of management practices are used at some yards which can be adapted to the needs of other yards. All facilities practice some degree of clean up at various times, although this may consist only of moving debris out of the work area when accumulations interfere with operations. During the docking period, some facilities use extensive clean-up procedures. In general drydock clean up is directed toward improving productivity and safety and toward maintaining acceptable working conditions. Both mechanical

and manual methods are in use. Control of water flows within the dock, like clean-up procedures, vary with each facility.

SECTION II

RECOMMENDATIONS

Based on the results of various studies, it is concluded that numerical effluent guidelines should not be established at this time because the nature of the discharge is not conducive to numerical monitoring.

On the basis of practices observed in and reported by various shipyards, Best Management Practices (BMP) have been developed for general application, and should be considered as guidance in lieu of numerical limitations. These are recommended for shipyard implementation by each individual facility in a manner best suited to the particular needs and conditions prevailing. The magnitude of the problem, equipment needed, physical drydock factors, scheduling, etc., should be considered in developing a plan to abate pollution.

The following specific requirements shall be incorporated in NPDES permits and are to be used as guidance in the development of a specific facility plan. Best Management Practices (BMP) numbered 2, 5, 7 and 10 should be considered on a case-by-case basis for yards in which wet blasting to remove paint or dry abrasive blasting do not occur, and BMP 10 does not apply to floating drydocks.

BEST MANAGEMENT PRACTICES (BMP)

- BMP 1. Control of Large Solid Materials. Scrap metal, wood and plastic, miscellaneous trash such as paper and glass, industrial scrap and waste such as insulation, welding rods, packaging, etc., shall be removed from the drydock floor prior to flooding or sinking.
- BMP 2. Control of Blasting Debris. Clean-up of spent paint and abrasive shall be undertaken as part of the repair or production activities to the degree technically feasible to prevent its entry into drainage systems. Mechanical clean-up may be accomplished by mechanical sweepers, front loaders, or innovative equipment. Manual methods include the use of shovels and brooms. Innovations and procedures which improve the effectiveness of clean-up operations shall be adapted, where they can be demonstrated as preventing the discharge of solids. Those portions of the drydock floor which are reasonably accessible shall be "scraped or broomed clean" (see Glossary) of spent abrasive prior to flooding.

After a vessel has been removed from the drydock and the dock has been deflooded for repositioning of the keel and

bilge blocks, the remaining areas of the floor which were previously inaccessible shall be cleaned by scraping or broom cleaning prior to the introduction of another vessel into the drydock. The requirement to clean the previously inaccessible area shall be waived either in an emergency situations or when another vessel is ready to be introduced into the drydock within fifteen (15) hours. Where tides are not a factor, this time shall be eight (8) hours.

BMP 3. Oil, Grease, and Fuel Spills. During the drydocked period oil, grease, or fuel spills shall be prevented from reaching drainage systems and from discharge with drainage water. Cleanup shall be carried out promptly after an oil or grease spill is detected.

BMP 4. Paint and Solvent Spills. Paint and solvent spills shall be treated as oil spills and segregated from discharge water. Spills shall be contained until clean-up is complete. Mixing of paint shall be carried out in locations and under conditions such that spills shall be prevented from entering drainage systems and discharging with the drainage water.

BMP 5. Abrasive Blasting Debris (Graving Docks). Abrasive blasting debris in graving docks shall be prevented from discharge with drainage water. Such blasting debris as deposits in drainage channels shall be removed promptly and as completely as is feasible. In some cases, covers can be placed over drainage channels, trenches, and other drains in graving docks to prevent entry of abrasive blasting debris.

The various process wastewater streams shall be segregated from sanitary wastes. Gate and hydrostatic leakage may also require segregation.

BMP 6. Segregation of Waste Water Flows in Drydocks. The various process wastewater streams shall be segregated from sanitary wastes. Gate and hydrostatic leakage may also require segregation.

BMP 7. Contact Between Water and Debris. Shipboard cooling and process water shall be directed so as to minimize contact with spent abrasive and paint and other debris. Contact of spent abrasive and paint by water can be reduced by proper segregation and control of wastewater streams. When debris is present, hosing of the dock should be minimized. When hosing is used as a removal method, appropriate methods should be incorporated to prevent accumulation of debris in drainage systems and to promptly remove it from such systems to prevent its discharge with wastewater.

- BMP 8. Maintenance of Gate Seals and Closure. Leakage through the gate shall be minimized by repair and maintenance of the sealing surfaces and proper seating of the gate. Appropriate channelling of leakage water to the drainage system should be accomplished in a manner that reduces contact with debris.
- BMP 9. Maintenance of Hoses, Soil Chutes, and Piping. Leaking connections, valves, pipes, hoses, and soil chutes carrying either water or wastewater shall be replaced or repaired immediately. Soil chute and hose connections to the vessel and to receiving lines or containers shall be positive and as leak free as practicable.
- BMP 10. Water Blasting, Hydroblasting, and Water-Cone Abrasive Blasting (Graving Docks). When water blasting, hydroblasting, or water-cone blasting is used in graving docks to remove paint from surfaces, the resulting water and debris shall be collected in a sump or other suitable device. This mixture then will be either delivered to appropriate containers for removal and disposal or subjected to treatment to concentrate the solids for proper disposal and prepare the water for reuse or discharge.

SECTION III

INDUSTRY CHARACTERIZATION

Shipbuilding and repair operations have been identified by EPA as a division of the ship construction industry requiring consideration of point source discharges which may require effluent limitation guidelines. Specifically, graving docks and floating drydocks were evaluated with respect to the potential contamination of receiving waters by wastes generated by ship repair and discharged during flooding of graving docks, immersion of floating drydocks, or with drainage water and runoff.

An engineering evaluation of graving dock and floating drydock operations was conducted to determine potential for generation of wastes from shipbuilding and repair operations in graving and floating drydocks. The practicality of establishing numerical effluent limitation guidelines was evaluated for drydocks. The evaluation was accomplished by:

- o Literature Research
- o Contacting and visiting shipyards
- o Observing ship repair operations and the applications of methods designed to reduce or eliminate polluttional constituents in effluents
- o Sampling and analyzing discharge constituents
- o Determining the feasibility of monitoring and sampling of waste discharges from graving docks and floating drydocks
- o Evaluating the technology being utilized to treat or control pollutant discharges, and determining what applicable technology may be applied to minimize the discharge of pollutants to receiving waters

There are eighty-four shipyards in the United States that utilize graving and floating drydocks. Among the shipyards are sixty-eight graving docks and 151 floating drydocks. In the conduct of the work, thirty-eight shipyards were contacted on the Atlantic Coast, Gulf Coast, Great Lakes and Inland Waterways, and Pacific Coast to determine which of the major shipyards are involved in minimizing pollutant discharges by utilizing specific control methods. Seven shipyards, referred to in the text by letters A through G, were visited to observe operations and record data. Samples were taken from the discharges from graving docks of two of these seven

shipyards, shipyards B and D. The samples were analyzed and the constituent levels were evaluated with respect to the ship repair operations being performed and the discharge control methods utilized. The analyses were combined with other engineering data to establish the degree of pollutant discharges, to define the nature of discharges from ship repair operations, and to recommend effluent limitation guidelines if practicable or alternatives to guidelines if necessary.

BACKGROUND - The Clean Water Act

The Federal Water Pollution Control Act Amendments of 1972 established a comprehensive program to "restore and maintain the chemical, physical, and biological integrity of the Nation's waters." Section 101(a). By July 1, 1977, existing industrial dischargers were required to achieve "effluent limitations requiring the application of the best practicable control technology currently available" ("BPT"), Section 301(b) (1) (A); and by July 1, 1983, these dischargers were required to achieve "effluent limitations requiring the application of the best available technology economically achievable ... which will result in reasonable further progress toward the national goal of eliminating the discharge of all pollutants" ("BAT"), Section 301(b) (2) (A). New industrial direct dischargers were required to comply with Section 306 new source performance standards ("NSPS"), based on best available demonstrated technology; and new and existing dischargers to publicly owned treatment works ("POTWs") were subject to pretreatment standards under Sections 307(b) and (c) of the Act. While the requirements for direct dischargers were to be incorporated into National Pollutant Discharge Elimination System (NPDES) permits issued under Section 402 of the Act, pretreatment standards were made enforceable directly against dischargers to POTWs (indirect dischargers).

Although Section 402(a) (1) of the 1972 Act authorized the setting of requirements for direct dischargers on a case-by-case basis, Congress intended that, for the most part, control requirements would be based on regulations promulgated by the Administrator of EPA. Section 304(b) of the Act required the Administrator to promulgate regulations providing guidelines for effluent limitations setting forth the degree of effluent reduction attainable through the application of BPT and BAT. Moreover, Sections 304(c) and 306 of the Act required promulgation of regulations for NSPS, and Sections 304(f), 307(b), and 307(c) required promulgation of regulations for pretreatment standards. In addition to these regulations for designated industry categories, Section 307(a) of the Act required the Administrator to promulgate effluent standards applicable to all dischargers of toxic pollutants. Finally, Section 501(a) of the Act authorized the Administrator to prescribe any additional regulations "necessary to carry out his functions" under the Act.

EPA was unable to promulgate many of these regulations by the dates contained in the Act. In 1976, EPA was sued by several environmental groups, and in settlement of this lawsuit EPA and the plaintiffs executed a "Settlement Agreement", which was approved by the Court. This Agreement required EPA to develop a program and adhere to a schedule for promulgating for 21 major industries BAT effluent limitations guidelines, pretreatment standards, and new source performance standards for 65 "priority" pollutants and classes of pollutants. See Natural Resources Defense Council, Inc. v. Train, 8 ERC 2120 (D.D.C. 1976), modified March 9, 1979.

On December 27, 1977, the President signed into law the Clean Water Act of 1977. Although this law makes several important changes in the Federal water pollution control program, its most significant feature is its incorporation into the Act of several of the basic elements of the Settlement Agreement program for toxic pollution control. Sections 301(b) (2) (A) and 301(b) (2) (C) of the Act now require the achievement by July 1, 1984, of effluent limitations requiring application of BAT for "toxic" pollutants, including the 65 "priority" pollutants and classes of pollutants which Congress declared "toxic" under Section 307(a) of the Act. Likewise, EPA's programs for new source performance standards and pretreatment standards are now aimed principally at toxic pollutant controls. Moreover, to strengthen the toxics control program, Congress added Section 304(e) to the Act, authorizing the Administrator to prescribe "best management practices" ("BMPs") to prevent the release of toxic and hazardous pollutants from plant site runoff, spillage or leaks, sludge or waste disposal, and drainage from raw material storage associated with, or ancillary to, the manufacturing or treatment process.

In keeping with its emphasis on toxic pollutants, the Clean Water Act of 1977 also revised the control program for non-toxic pollutants. Instead of BAT for "conventional" pollutants identified under Section 304(a) (4) (including biological oxygen demand, suspended solids, fecal coliform and pH), the new Section 301(b) (2) (E) requires achievement by July 1, 1984, of "effluent limitations requiring the application of the best conventional pollutant control technology" ("BCT"). The factors considered in assessing BCT for an industry include the costs of attaining a reduction in effluents and the effluent reduction benefits derived compared to the costs and effluent reduction benefits from the discharge of publicly owned treatment works (Section 304(b) (4) (B)). For non-toxic, nonconventional pollutants, Sections 301(b) (2) (A) and (b) (2) (F) require achievement of BAT effluent limitations within three years after their establishment or July 1, 1984, whichever is later, but not later than July 1, 1987.

SUMMARY OF METHODS USED FOR DETERMINING THE PRACTICALITY OF EFFLUENT LIMITATIONS GUIDELINES AND STANDARDS OF PERFORMANCE

The recommendations and standards of performance proposed herein have been developed in the following manner.

Industry and Waste Load Categorization

The industry was first studied to determine whether or not separate limitations and standards would be required for different divisions within the category. Factors considered included the nature of the physical facilities involved, the types of activities performed, processes within each activity, and materials used.

Raw waste characteristics were then identified. This included analyses of (1) the sources and volumes of water required in each process, (2) non-process related sources of wastes and wastewaters, and (3) the components potentially present in wastewaters.

Wastewaters originating from the vessel in drydock included sanitary wastes and cooling water. (Sanitary wastes are not included in the scope of this document). Dock originating wastewaters were identified as gate and dock leakage, rainfall, water from occasional wet blasting operations, and water used in flooding the drydock for docking and undocking of the vessels.

The major concern with respect to potential pollution problems was identified as spent paint and abrasive blasting material. Hull cleaning practices were found to vary within each yard contacted, and the magnitude of this potential problem likewise varies.

Recommendations for reducing or eliminating potential environmental hazards have been based upon information obtained in the course of this effort, prior work performed by other organizations, and literature available as reference material.

Treatment and Control Technologies

The range of control and treatment technologies within the industry was identified. Included were both treatment technology and operating practices. Applicability and reliability of each treatment and control technology were investigated, as was the required time for implementation. In addition, environmental impacts of such technologies upon other pollution problems, such as air and solid waste, were identified.

Data Base

Engineering data was obtained from a number of sources including EPA and U.S. Navy research information, EPA, Navy and State environmental personnel, trade associations, published literature, qualified technical consultations, and historical information on effluent quality and quantity. In addition, on-site engineering visits and analytical programs were conducted at specific shipyards and other shipyards were contacted for information. Table III-1 describes the extent of this shipyard information acquisition program. NPDES permits and water pollution control plans for these facilities were reviewed. Results of monitoring required under the permits were of value when samples were taken at outfalls directly related to drydock operation.

Table III-1

SUMMARY OF SHIPYARD INFORMATION ACQUISITION PROGRAM

<u>Category</u>	<u>Total in Category No. of Docks (No. of Shipyards)</u>	<u>Contacted No. of Docks (No. of Shipyards)</u>	<u>Visited No. of Docks (No. of Shipyards)</u>
Graving Docks			
East Coast	39 (14)	15 (6)	5 (2)
Great Lakes	8 (5)	8 (5)	2 (1)
Gulf Coast	3 (3)	0 (0)	0 (0)
West Coast	18 (5)	12 (4)	4 (2)
Total	68 (27)	35 (15)	11 (5)
Floating Drydocks			
East Coast	58 (21)	29 (8)	3 (1)
Great Lakes	7 (3)	7 (3)	0 (0)
Gulf Coast	36 (21)	13 (6)	2 (1)
West Coast	50 (23)	30 (11)	4 (2)
Total	151 (68)	79 (28)	9 (4)

Previous work has been performed by others in an effort to characterize and limit discharges from shipyard activities. One such study by Hamilton Standard Division of United Technologies, Inc., recommended clean-up techniques rather than effluent limitations (Reference 1).

Other studies have been performed in an effort to facilitate issuance of NPDES permits. The EPA Office of Enforcement, Denver, Colorado conducted studies of San Diego and Newport News harbors. On the basis of its findings, housekeeping measures were recommended, primarily to prevent contact between water and spent abrasive and paint blasted from the vessels (Reference 2).

Various leaching studies have been performed to determine whether or not spent paint and abrasive are leachable. Section V discusses the results of these studies. These previous efforts have been considered in the current work.

Cost information was obtained directly from industry during shipyard visits, from engineering firms, equipment suppliers, and from the literature. These costs have been used to develop general capital, operating, and total costs for each treatment and control method. This generalized cost data was used to estimate the costs of Best Management Practices in Section VIII.

Selection of Facilities

From the total population of drydocking facilities thirty-eight were contacted by telephone to obtain information on practices and operations, seven were visited by project personnel, and of the latter group two were selected for sampling of wastewater during operations.

Shipyards contacted by telephone were located in all geographic areas of the continental United States. Visits were conducted to yards located on the East, West, and Gulf Coasts, and on the Great Lakes. Sampling was conducted on the East and West Coasts.

GENERAL DESCRIPTION OF INDUSTRY

Activities Carried Out At Shipyard Facilities

The shipbuilding and repair industry is engaged in building, conversion, alteration, and repair of all types of ships, barges, and lighters. These activities encompass a broad range of functions, such as: erection of structural steel frameworks and fastening steel plates to the framework to form a hull; application of paint systems to hull; installation of a variety of mechanical, electrical, and hydraulic equipment within the structure; repair of damaged vessels; replacement of expended or failed paint systems; and restoration of malfunctioning equipment and systems to operational condition. Typical of the trade skills involved in this industry are: shipfitters; metalsmiths; welders and burners; machinists; electricians and electronic technicians; pipefitters and coppersmiths; carpenters, joiners and patternmakers; painters; riggers and laborers; blacksmiths; boilermakers; and foundrymen. Not all of the listed activities,

functions, or trade skills are utilized at every facility. Some of the functions require placing the ship into drydock, e.g., replacing underwater paint systems. Only those facilities providing drydocking capabilities are covered in this document.

Graving Dock Description

Graving docks are constructed with sides and a bottom and with a gate at the water end. The bottom is located below the adjacent water surface level with sufficient depth to allow floating of a vessel into the dock. Operations consist of positioning keel blocks on the bottom of the dock to match the keel surface of the ship, flooding the dock by opening valves, opening the gates, positioning the vessel over the keel blocks, closing the gates, and pumping the water out of the graving dock. During maintenance operations, the graving dock is kept dry by sump or stripping pumps which remove fluids and water by providing suction through drains located at low points in the dock. After completing operations on the vessel, the dock is flooded, the gates are opened, and the vessel is floated out of the dock. The gates to the graving dock are closed and the water is pumped out to make preparations for receiving another vessel, or, if identical vessels are being maintained, the next vessel is moved into the dock prior to removing the water.

Graving docks are usually constructed of concrete although they may occasionally be of timber or steel sheetpile cell construction. Figure III-1 illustrates typical cross section and plan views of a concrete graving dock and includes the designations of drydock features.

The preferred method of entrance closure is by floating caisson. Other available types of closure are: miter gates, flap gates, set-in-place gates, sliding caissons and rolling caissons. Floating caissons are watertight structures with flooding and dewatering systems for operation. For design of hull, floating stability, and all operational purposes, they are symmetrical both transversely and longitudinally. Miter gates were probably the first satisfactory mechanical gates. Each closure consists of a pair of gate leaves, hinged at the dock walls, swinging horizontally so that when closed, the free ends meet in fitted contact. Gates are moved by means of a hawser to a nearby power capstan. The sides and bottoms of the gates bear against seats in the drydock walls and floor. A flap gate is a rigid, one-piece gate hinged at its bottom, and swinging downward and outward. It is a compartmented structure with means for varying its bouyancy for raising and lowering. Set-in-place gates are in various forms, and may be built in one piece or multiple sections. They are of beam and plate construction, with reactions carried to the walls by girders and to the floor by beams. Sliding caissons and rolling caissons are built-in box shapes, mounted on hardwood sliding surfaces

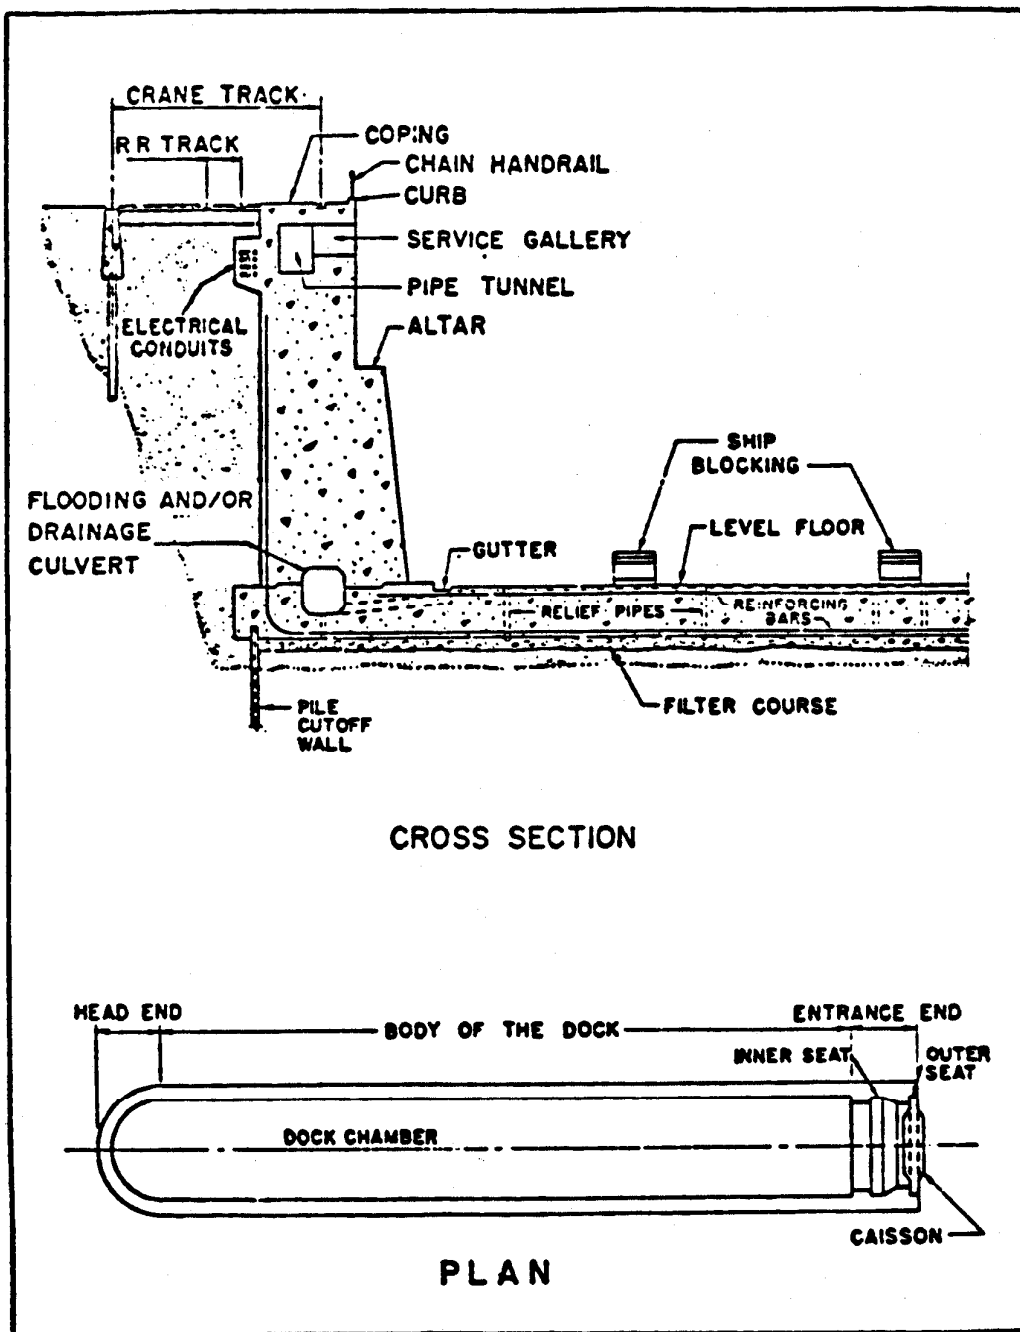


Figure III-1. Typical Graving Dock

or metal rollers which move them into or out of place. They may be equipped with air chambers for bouyancy which reduce the work of moving.

There are three general methods used for admitting water into graving docks. These methods are: (1) through culverts built into the lower parts of sidewalls and connected to floor openings spaced along a dock length, (2) through culverts passing transversely under the floor near the entrance with openings leading upward into the floor, or (3) through ducts in an entrance closure caisson.

Graving docks have two dewatering systems. The collector channel, a wide, deep, grating covered open culvert leading to the pump suction chamber, handles the greater portion of water pumped out of the flooded graving dock. Installation of a settling basin may be justified because abrasive materials harmful to pumps and pump fittings may be washed off a graving dock floor into the pumping system where damage may result.

The main dewatering system of a drydock usually includes: (1) the suction inlet located within the dock chambers; (2) the suction passage and culvert; (3) pump suction chamber; (4) pump suction bells; (5) pumps; (6) discharge, check, and gate values; (7) discharge culvert including backwash trash rack; and (8) hinged stop gate. Where pumping plants are designed to remove water from more than one dock, additional sluice gates are required to permit independent pumping of the docks. At least two main dewatering pumps are usually required to achieve reasonable dewatering times.

A secondary system collects the last few inches of water blanketing the graving dock floor. This system has sloping longitudinal floor drain culverts near the sidewalls which lead to collector channels at pump wells. The culverts may have rectangular cross-sectional areas of several square feet. They are covered by securely anchored strong gratings. Drainage and sump pumps, of lesser capacity than the main dewatering pumps, are provided to remove seepage, precipitation, caisson and valve leakage, and wash water, and to clear the dewatering pump suction chamber and drainage system.

Ships in graving docks do not ordinarily fill all their own requirements for mechanical services essential for work, habitation, comfort, and protection. Some services, particularly those required for repairs and cleaning associated with the docking operations, must be supplied from dockside facilities. Such services include the delivery of steam, compressed air, water, systems for tank cleaning, and oxygen and acetylene or electricity for welding. Utility services are provided to ships in drydock by lines from service galleries located around the upper perimeter of the dock. The drydock also has a tank cleaning system. Means must be provided to keep a docked

vessel far enough above the floor to permit work on its keel, giving proper allowance for removal or installation of sonar domes, rudders, propellers, and similar parts. Blocking arrangements are laid out in the dock in accordance with the docking plan for each individual vessel. Keel blocks are placed under the longitudinal centerline keel of the vessel. Bilge or side blocks are located according to dimensions indicated in the table of offsets on the vessel's docking plan. In some cases, block slides are built into the dock itself. In addition, such supporting facilities as industrial shops, transportation facilities, weight and materials handling equipment, personnel and storage facilities are normally located in close proximity to drydocks.

Floating Drydock Description

As implied by its name, a floating drydock floats on the water with the bottom of the drydocked vessel above the water surface. The floating drydock is a non-self-propelled mobile structure. The floating drydock consists of a platform and associated ballast tanks used to raise ships above the water level for work which requires exposure of the entire hull. Ballast tanks are flooded and the dock platform is submerged to a predetermined level beneath the water's surface. A ship is then moved over the dock and positioned over preset keel and bilge blocks on the floor of the dock platform. This position is maintained as the ballast tanks are dewatered. Dewatering the ballast tanks lifts the ship and drydock platform floor above the surface of the water (Reference 4).

The following discussion of the sinking and refloating procedures along with a schematic representation of the action is quoted from Appendix A of Reference 4.

"Many different types of floating drydocks have been developed. The specific characteristics of the various types differ considerably as a consequence of the different requirements dictated from considerations of technical, operational, or strategic nature. However, the basic general features and the related terminology are, more or less, the same for all types of docks.

'Figure III-2 illustrates the various parts of a typical floating drydock. The nomenclature used in the figure is standard.

'The lower, horizontal portion of a U-shaped trough which forms the dock structure is called the pontoon. The top of the pontoon, the pontoon deck, forms a platform on which are three or more rows of blocks which support a ship when docked. The pontoon constitutes the main platform for the work to be performed on the docked ship. In order to increase the working

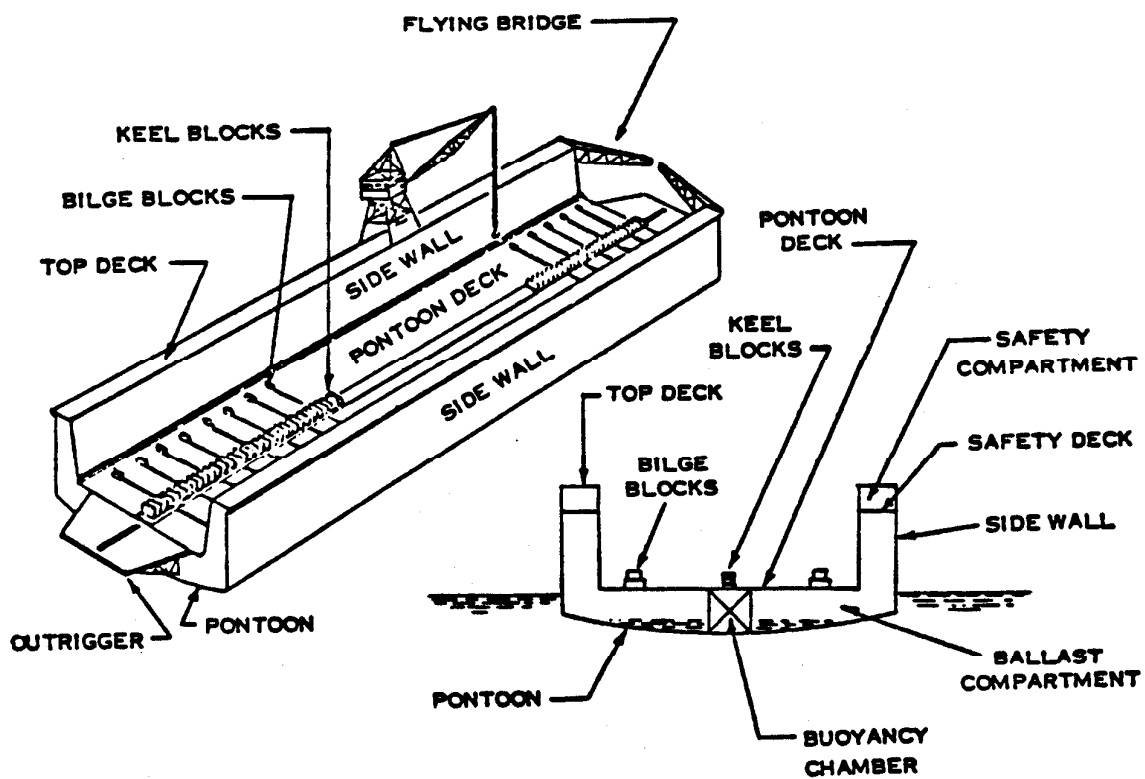


FIGURE III-2. Typical Transverse Section of a Floating Drydock

platform, cantilevered extensions, outriggers, are fitted at the ends of the pontoon deck. The outriggers do not bear any part of the ship's weight, but are particularly convenient for setting up staging around the ends of a long ship.

'Above the two sides of the pontoon stand the side walls. The side walls extend vertically to form, with the pontoon, the U-shape of the dock trough. The top of the side walls is sufficiently high as to be afloat when the dock is submerged to receive the largest ship it is capable of docking. The side walls usually extend to the full length of the dock. The top deck of each side wall provides the necessary equipment and working space for handling the ship's docking lines. Gantry cranes required for handling material travel on tracks along the length of the top decks.

'Flying bridges are often installed at one or both ends of the top decks, to provide personnel passage between the top decks. They consist of hinged cantilever arms, which can be swung open to permit the ship to enter or leave the dock.

'Most of the space contained within the pontoon and side walls is utilized as ballast tanks. The admission of water to or its removal from these spaces creates the forces that cause the dock to submerge or rise. The remaining space consists of chambers which keep the dock afloat and their size determines the limit to which the dock will submerge when all ballast tanks are full. Spaces, termed buoyancy chambers in the pontoon and the safety compartments in the wing walls, serve this purpose. These buoyancy chambers, not being subject to flooding, may also be utilized to accommodate machinery, equipment, personnel quarters, mess rooms, workshops, and stowage spaces.

'The larger floating drydocks are sectionalized to facilitate movement overseas and to render them capable of self-docking. They can transit the Panama Canal.

'One type of floating drydock, the closed basin, ARD type, differs somewhat in design and operation from the other docks. The forward end of the dock is closed by a structure resembling the bow of a ship; the aft end is opened and closed by operation of a stern gate. Lift forces are provided by emptying the ballast tanks and by emptying the dock basin.

'Figure III-3 shows typical inside and outside water levels for a complete docking cycle."

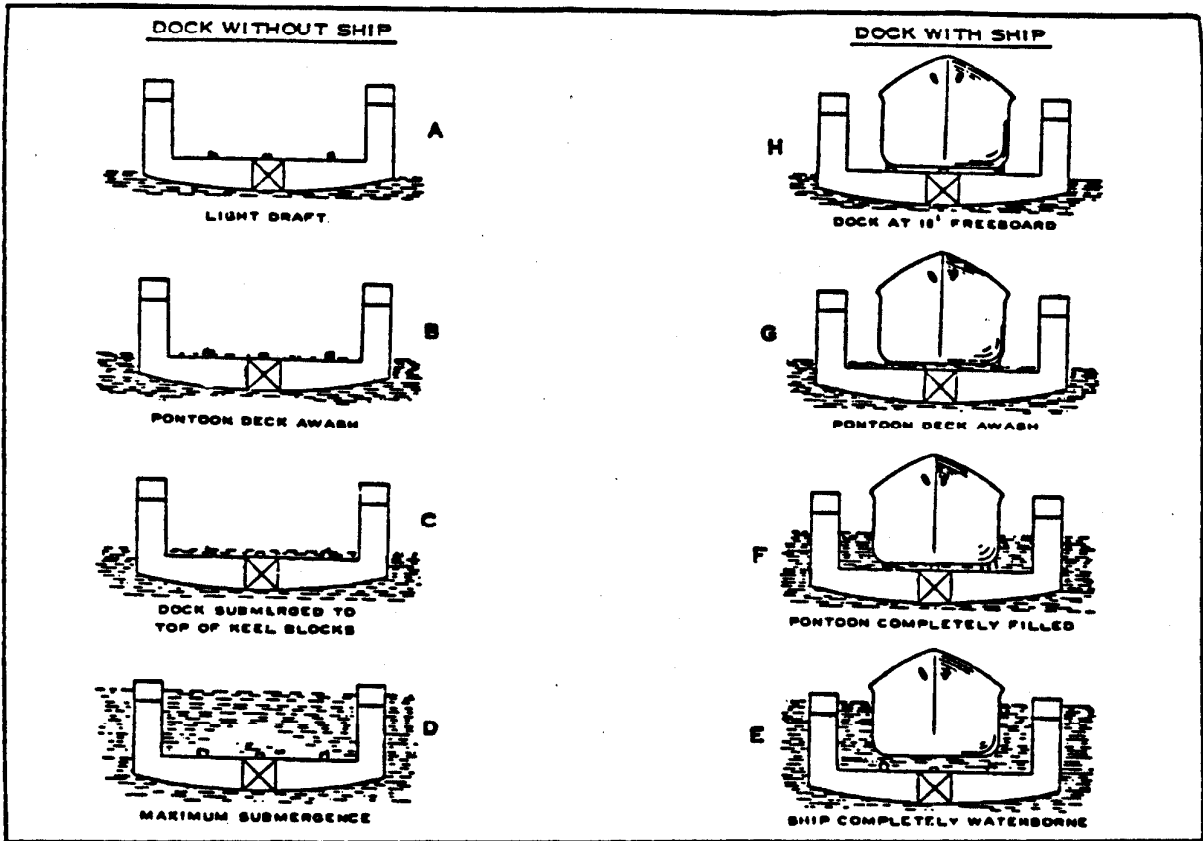


FIGURE III-3. Typical Inside and Outside Water Levels For Complete Docking Cycle of Floating Drydock

Shipyard Practices

This section is limited to discussion of those operations normally or most frequently performed in drydock with full recognition that almost the entire range of activities listed in "Activities Carried Out at Shipyard Facilities" above are available and may on occasion be required. The basic functions of a drydock are the construction and repair of ships and the cleaning, and painting of ships' bottoms, propellers, rudders, and the external parts below the water line.

Drydocks provide access to the ship's bottom and utilities services to shipyard personnel. Drydocks supply gas, electricity, steam, compressed air, fresh water, and salt water to the ship in drydock from lines attached to or embedded in the drydock. Processes involved in drydocking include docking, undocking, tank cleaning, abrasive and chemical paint removal, painting and mechanical repair of various ships' parts. Mechanical repairs of machinery, welding, cutting of plates, and alterations of a ship's structure are other functions performed in drydock (Reference 5).

Tank cleaning operations remove dirt and sludges from fuel tanks and bilges on the ship. Workmen spray detergents, or hot water, into the emptied tanks by injecting cleaners into the steam supply hoses. Spent wash water in the tanks is pumped by Wheeler (TM) machines, which are combination pump and storage tank units, into tank trucks or barges for subsequent disposal (Reference 5).

The almost universally preferred method of preparing steel surfaces for application of a fresh paint system for saltwater immersion is dry abrasive blasting. For solely freshwater immersion, light hydroblasting (a water sweep) may be adequate to remove loose, flaking or non-adhering paint in preparation for refurbishing paint systems.

With the exception of the closed-cycle blast machines being currently being developed and evaluated, all blasting presently carried out within drydocks is done manually. Three manual blasting methods are used within drydocks, and the characteristics of the debris produced by each method are markedly different.

Dry abrasive blasting is a process by which the blasting abrasive is conveyed in a medium of high pressure air, through a nozzle, at velocities approaching 450 feet per second. This type of blasting produces the highest relative amount of dust, and resulting residues are dry. Dry blasting is used for virtually all tank interior work and extensively on exterior hull work (Reference 6).

The two other manual blasting methods are wet abrasive blasting in which water replaces air as the propellant and water cone blasting in

which a spray of water surrounds the air driven abrasive streams (Reference 7).

Organotin antifouling paints may produce toxic dust if subjected to dry blasting. Thus, wet blasting techniques are used when removing these paints (Reference 6). Wet or slurry blasting is also used in cleaning special underwater equipment, such as resin-constructed sonar domes, to protect them from damage (Reference 8). Wet blasting procedures significantly reduce dust occurrence. A rust inhibitor may be added to the water or slurry to prevent rusting of surfaces before painting. Rust inhibitor solutions may vary but usually will be composed of diammonium phosphate and sodium nitrite along with the abrasive grit and water.

An abrasiveless method of blasting using jets of high pressure water, hydroblasting, has been demonstrated for some purposes. Generally, this will only remove surface debris and loose or flaking paint. By going to very high pressures, on the order of 10,000 psi, adhering paint can be removed to bare metal. Hydroblasting is rarely used in shipyard operations.

Blasting practices were found to vary widely between facilities. Many factors influence this, some of which are discussed later in this section. Table III-2 summarizes the blasting practices used in shipyards visited during the conduct of this study. Type of blasting, frequency of occurrence, amount of paint removal, and blasting medium are qualitatively indicated, as are the type and number of docking facilities.

Table III-2

ABRASIVE BLASTING

Ship- yard	Facilities FD	Type of GD Blasting	Frequency	Usual Amount of Paint Removal	Blasting Medium*
A	3	1 Dry	Usually	Usually to Bare Metal	Camel Black
B	0	5 Dry	Usually	Depends on Vessel, Sand Sweep to Bare Metal	Black Beauty
C	0	2 Dry	Rarely	None	NA
D	2	3 Dry, Also Closed Cycle	Usually	Usually to Bare Metal	Kleen Blast
E	0	1 Dry	Usually	Depends on Vessel	Kleen Blast
F	0	2 Dry	Rarely	Only for Repair Work	Black Beauty Campbell Black #2
G	2	0 Dry	Usually	Depends on Vessel, Never to Bare Metal	Sand Blast

*By trade name.

FD = Floating Drydock, GD = Graving Dock, NA = Not Applicable

Of the seven facilities visited, none uses wet blasting routinely and only one indicated its use on rare occasions. Shipyard F uses abrasive blasting only in conjunction with repair work such as welding.

There are two techniques in use for dry abrasive blasting. The first, generally known as "sand sweep," is frequently used on commercial vessels to remove marine growth, fouling and delaminating coatings only in preparation for refurbishment or renewal of paint systems. The second, more frequently used on naval vessels, removes marine growth, fouling, and all paint down to "white metal" and abrades the metal substrate to provide a suitable surface for adherence of a complete fresh coating system.

The following procedure quoted from Reference 9, describes the entire cycle of abrasive blasting. It applies equally well to dry or wet abrasive blasting except for addition of water at the appropriate point in the cycle. It should be noted that the full cycle is not carried out at all shipyards - e.g., some facilities have the grit delivered to their site in the hoppers from which it flows into the pressure pot.

"Procedure

- o Abrasive is delivered in large quantities as a free flowing material by covered railway hopper car or dump truck.
- o Abrasive is transferred from shipping unit to storage areas by allowing abrasive to flow from shipping unit onto conveyer belts that dump it into forklift hoppers or directly into storage bins. Usually, abrasive storage will be covered by a permanent structure or temporary covers (canvas or plastic tarpaulin).
- o When abrasive is required, large hoppers, in excess of 6-ton capacity, are loaded by scoop tractor or vacuum loaders. When full, these hoppers are transferred to the job site by forklift truck.
- o Abrasive from these hoppers is transferred into the pressure pots, usually by gravity feed.
- o Finally, the abrasive is propelled from the sandblast nozzle by compressed air to forcibly impinge on the surface being cleaned.
- o Spent abrasive, paint particles, fouling organisms, and other debris fall to the drydock floor.

- o The debris from the sandblast operations is picked up by scoop tractors, hand shovels, and/or other method for transfer to hoppers or skip boxes.
- o In some shipyards, spent metallic abrasive is reclaimed and reused, but abrasive contaminated with antifouling paint is discarded in designated landfill areas."

The abrasive may be either metallic or nonmetallic. Practically all blasting is done with certain by-product mineral abrasives which are low in free silica content. The specification (Reference 10) used by naval shipyards purchasing grit allows a maximum of 5 percent free silica content. The constituents of abrasive blast materials currently in use by U.S. Naval Shipyards are shown in Table III-3. Rationales of naval shipyards for purchasing particular abrasives include: low free silica content; less dusting; performance; availability; and price (Reference 8). Commercial facilities use the same or similar materials for like reasons.

Ships in drydock may be painted internally, on the hull and on the superstructure. Because the painting of the superstructure does not require a dry hull and because drydock availability is limited and expensive, superstructures are frequently painted while the ship is at berth or at sea. The bulk of painting activity in a drydock is on a ship's hull and internal fuel and water tanks. Anchor chains, anchors and portable ships' machinery are frequently placed on wooden pallets in the drydock for painting. Paints applied to protect metal from corrosion or fouling are sprayed onto most surfaces although painting of irregularly shaped objects such as chains is sometimes performed with brushes. Occasionally paints are applied to flat or gently curving surfaces by roller.

There are two kinds of paint spraying equipment in use. One uses a stream of compressed air to convey the paint from container to surface being painted. A newer method rapidly increasing in use employs hydrostatic pressure to convey the paint. It is claimed that airless paint spraying is more efficient because of very low paint loss due to drift or overspray. Almost all of the paint is applied to the intended surface. Estimates of losses due to drips, spills, and overspray range from 1 to 2% for airless paint spraying. Observations during shipyard visits of spills while mixing, noticeable overspray from airguns, and concentrations of droplets on the surface of water running through drainage gutters generates more confidence in the higher than in the lower figure. Occasionally, flowing water is purposefully used to carry spilled paint into drainage gutters.

Anticorrosive and antifouling paints are typically used on ships in drydocks. To these paints may be added differing pigment materials such as lampblack, red iron oxide, or titanium dioxide to achieve a

Table III-3. CONSTITUENTS OF ABRASIVE BLAST MATERIAL
AT NAVAL SHIPYARDS

CONSTITUENTS % BY WEIGHT (SEE NOTE)

FACILITY	IRON OXIDE	CALCIUM OXIDE	POTASSIUM OXIDE	ALUMINUM OXIDE	MAGNESIUM OXIDE	SODIUM OXIDE	COMBINED SILICON DIOXIDE	COPPER	CHROMIC OXIDE	TITANIUM	MANGANESE	ZINC OXIDE	FREE SILICA	SULFUR	OTHER
PORTSMOUTH															
BLACK DIAMOND	28	6.14		21	1.1		43			.95	.04			.15	.17
PHILADELPHIA															
POLYGRIT	42	12	.03	11	2	1	17	.7	1			13			
NORFOLK															
BLACK BEAUTY	35	4	2	23	1	1	34								
CHARLESTON															
SAF-T-BLAST	28			21			50			1					
LONG BEACH															
KLEEN BLAST	19	19		9	2.9		48	.1			.22				
HARE ISLAND															
GREEN DIAMOND	23	.6		1	23	.05	52		.04				.3	.01	
PUGET SOUND															
BLACK DIAMOND	17	22	.7	9	3	.2	36	.6	.5			12			
ROCK-WOOL SLAG	16	26	2	9	3	1	39	.2	.5			4			
PEARL HARBOR															
BLACK DIAMOND	19	19		9	3		48	.1			.22				
UAM															
GREEN DIAMOND	23	.6		1	23	.05	52		.04				.3	.01	

NOTE: Totals may not equal 100 due to rounding off. Since percentages vary between lots, these values are approximations of the average.

Table III-4. COMPOSITIONS OF FORMULA PAINTS

Formula No.	Mil. Spec. No.	Composition	lb/100 gal	gal/100 gal
117 Anti-corrosion	Mil.P-15328	Polyvinyl-butyril resin	56	6.10
		Zinc chromate	54	1.59
		Magnesium silicate	8	0.35
		Lampblack	0.6	0.04
		Butyl alcohol	125	18.40
		Ethyl alcohol	482	70.70
		Phosphoric acid	28	2.0
		Water	25	3.0
119 Anti-corrosion	Mil.P-15929	Rod Lead	220	2.9
		Vinyl resin	145	12.8
		vinyl chloride		
		vinyl alcohol		
		vinyl acetate		
		Tricresyl Phosphate	15	1.5
		Methyl Isobutyl Ketone	295	43.8
		Toluene	295	40.0
121 Anti-fouling	Mil.P-15931	Cuprous oxide	1440	27.40
		Rosin	215	23.07
		Vinyl resin	55	4.69
		Tricresyl phosphate	50	4.92
		Methyl Isobutyl Ketone	165	23.88
		Xylene	115	15.42
		Anti-settling agent	5 to 9	0.62
129 Anti-fouling	Mil.P-16189	Cuprous oxide	1120	21.62
		Lampblack	70	4.50
		Rosin	185	19.83
		Vinyl resin	45	3.84
		Tricresyl phosphate	40	3.93
		Methyl Isobutyl Ketone	200	28.92
		Xylene	130	17.42
		Antisettling agency	5 to 9	0.64
1B30	Mil.P-24441	Thixatropes	10 to 20	
1B29		Polyamide	20	
1B27		Polyamide adduct	280 to 320	
150		Magnesium silicate	250 to 600	
151		Titanium dioxide	5 to 600	
152		Butyl alcohol	253 to 304	
153		Copper phthalocyanine		
		blue	0 to 1	
154		Yellow iron oxide	0 to 500	
155		Red iron oxide	0 to 300	
		Epoxy resin	500 to 586	
		Naptha	215 to 258	
Anti-corrosive		Diatomaceous silica	0 to 150	
		Lampblack	0 to 18	
			lb	
1020A		Vinyl resin	161	16.1
Anti-fouling		-bis (Tributyltin) oxide	38.3	4.0
		Tributyltin fluoride	167	16.1
		Carbon black	19.4	1.3
		Titanium dioxide	7.2	0.2
		Ethylene glycol mono-		
		ethyl ether acetate	28	3.4
		Normal prepanol	102	15.1
		Normal butyl acetate	400	54.8

particular decorative or camouflage effect. Table III-4 presents the chemical composition of the most commonly used external hull paints on navy ships.

The anticorrosive paints are either vinyl or vinyl and lead based, or are of the newer epoxy type which is slowly supplanting the vinyl and vinyl-lead paints. Substantial quantities of both types of paints are being used in shipyards, with some epoxy paints of unknown exact compositions being supplied by manufacturers but having characteristics essentially similar to the Navy standard formula. Both types of paints will be removed by abrasive cleaning methods.

Antifouling paints are designed to prevent growth and attachment of marine organisms on hulls of ships by releasing minute quantities of toxic substances in the immediate vicinity of the hull surface. Copper-based paints using cuprous oxide have been the standard for many years (Reference 5). The use of organotin paints is very recent, but growing. Tributyl tin fluoride (TBTF) and tributyl tin oxide (TBTO) are the principal toxicants. Table III-5 identifies some organotin antifouling paints commercially available.

Table III-5
COMPOSITIONS OF
ORGANOTIN ANTIFOULING PAINTS

<u>Identification</u>	<u>Contents</u>
M.I. Formula 1020A	Vinyl/TBTO/TBTF
Devran MD-3198	Vinyl/TBTF
Amercoat 1795	Vinyl/TBTO
Tarset 305	Coal tar epoxy/TBTA
Andrew Brown Colortox (Brolite Z-Spar)	Vinyl/TBTF
M.I. Formula 1010	Vinyl/TBTO/10,10 ¹ -oxybis- phenoxarsine
M.I. Formula 1028	Vinyl/rosin/TETF/Cu ₂ O
Biomet	Vinyl/TBTF
M.I. Formula 1011	Vinyl/TBT neodecanate/TBTF
Devoe XM-075	Epoxy/Cu ₂ O/TBTO
Pusthan VY-5529	Vinyl/TBTF
Glidden No-Cop AF	Vinyl/TBTO
International Tri-lux 40 (wide spectrum AF, Mark I)	Vinyl/TBTF
International Tri-lux 68 (wide spectrum AF, Mark II)	Vinyl/TBTF
Note: TBTO = Tributyl Tin Oxide TBTF = Tributyl Tin Fluoride	

Reference 11

The industrial operations carried out in drydocks result in considerable amounts of debris collecting on the dock floor. This debris consists of:

- o Marine organisms removed from the hull by washing or blasting
- o Spent grit from abrasive blasting (whether wet or dry)
- o Old paint particles, flakes, and chips abraded from the hull
- o Rust particles and flakes abraded from the hull
- o Fresh paint dripped, spilled, or oversprayed onto the other debris during application to the hull, machinery, or equipment.

These materials have constituents that are potential pollutants to adjacent navigable waters. In addition to the pollution potential, the debris is a hindrance to further industrial operations in the drydock, a wear hazard to dewatering and drainage pumps, a weight addition to floating drydocks, and an inconvenience to people who must work in the dock. All shipyards clean up and remove the debris but there is wide variation in the frequency, technique, and thoroughness.

In addition to ship repair and maintenance practices, other factors can affect the kind and amount of wastes generated in drydock. During the conduct of this study it was established that wide differences exist between practices at shipyards and between conditions existing at each yard. These differences also influence the waste load generated. Among the factors noted as having impacts upon waste generation are:

- o Location - fresh vs. saltwater
- o Type of ships serviced
- o Extent of utilization and time of stay in dock
- o Type of facility, configuration, and age
- o Clean-up practices

Table III-6 summarizes, for facilities visited, factors relevant to the drydock location which bear upon the quantity and type of waste.

Table III-6

LOCATION FACTORS

<u>Ship- yard</u>	<u>Location</u>	<u>Type of Water at Facility</u>	<u>Climate</u>	<u>Predominant Vessel Service</u>	<u>Predominant Type of Vessel</u>
A	East Coast	Brackish	Moderate	Ocean	Commercial
B	East Coast	Salt	Moderate	Ocean	Commercial & Naval
C	West Coast	Salt	Moderate	Ocean	Commercial
D	West Coast	Salt	Very Dry	Ocean	Naval
E	West Coast	Salt	Very Dry	Ocean	Naval & Commercial
F	Great Lakes	Fresh	Moderate	Inland	Commercial
G	Gulf Coast	Fresh	Wet	Inland & Ocean	Commercial

The facilities located in the Great Lakes and Gulf Coast areas were both on river sites. The Great Lakes yard, however, services only inland waterways vessels while the Gulf Coast yard services both ocean and inland vessels. All other yards which were visited service predominantly oceangoing vessels. Also shown in Table III-6 are the ownership, commercial, or naval, of the ships predominantly serviced. The two factors, ocean vs. inland, and naval vs. commercial, have a major influence on the operations in the dock and the wastes produced. Oceangoing vessels generally require antifouling paints while freshwater vessels as a rule do not. Thus, antifouling paints are removed from oceangoing vessels when repainting is needed. This does not occur in strictly freshwater operations.

The seven facilities visited included two on the West Coast, three on the East Coast, one on the Gulf, and one on the Great Lakes. Of these seven, two facilities had freshwater locations, four had ocean locations, and one was located on an internal body of water. Two facilities were naval and the balance were commercial. Finally, the age and condition ranged from over fifty years and poor to one year and excellent.

Naval vessels enter drydock for extensive maintenance. During the course of this maintenance, the antifouling and anticorrosive paints are removed to bare metal. Extensive paint removal is not usually practiced on commercial vessels. In general, freshwater commercial ships may receive no blasting prior to repainting, while naval vessels are completely refurbished from bare metal. Thus, larger quantities of spent paint and abrasive usually result from work on naval vessels than from commercial ships.

A number of other factors act to create differences in drydocking and service practices between naval and commercial vessels. Commercial vessels customarily are drydocked annually or biennially for inspection. During these drydockings, hull repainting may be undertaken; however, due to the short period between drydockings, paint deterioration may not be severe and fouling may be minimal or moderate. In addition, commercial vessels are usually on the move and this reduces the amount of fouling which can occur. Naval vessels are drydocked on a routine basis at intervals of up to five years or more. Hull preparation and painting must be designed to provide protection for that period, thus cleaning to bare metal and the use of higher levels of toxicants in antifouling paints than for commercial vessels is customary. Since naval vessels spend much time in port or at anchor, the potential for fouling is more severe than if they were underway.

Utilization of the drydocking facilities is another factor which influences the total waste generated. Yards contacted indicated utilizations ranging from 30 percent to 100 percent. A drydock which

is used infrequently or intermittently has less total discharge than one operating on short turnaround service at a high rate of utilization. Facilities used for new construction usually are occupied by the activity for periods in excess of a year. In this case, not only is the nature of the operation less productive of waste (no spent paint to blast off the hull) but flooding occurs only at launch, once per ship. Table III-7 summarizes drydock utilization for yards contacted and visited.

Table III-7

UTILIZATION OF DRYDOCKING FACILITIES

	Percent Utilization ¹				
	<u>0-30</u>	<u>31-50</u>	<u>51-70</u>	<u>71-90</u>	<u>>90</u>
<u>Facilities Visited</u>					
Graving Docks	2	0	2	2	2
Floating Drydocks	0	0	3	5	2
<u>Facilities Contacted</u>					
Graving Docks	2	7	2	5	4
Floating Drydocks	6	13	6	20	1
Building Basins ²					2
<u>Totals</u>					
Graving Docks	4	7	4	7	6
Floating Drydocks	<u>6</u>	<u>13</u>	<u>9</u>	<u>25</u>	<u>3</u>
TOTAL	10	20	13	32	9

¹Information not available: Graving Docks, 8;
Floating Drydocks, 20.

²Not included in totals.

Geographic factors can have a major influence on wastewater from drydocking facilities, especially from graving docks. Facilities located in regions of low rainfall do not have the problem of rainwater wetting the dock floor. This is true for both floating and graving docks. Thus, in those regions spent paint and abrasive can usually be removed dry. Graving docks are frequently subject to groundwater flows into the dock basin. This problem can be critical in some docks, while for others, it does not exist. Unless provisions are made to confine and remove rainfall and groundwater (hydrostatic relief water), waste may be carried from the dock with the dewatering flows.

The age and type of construction of the drydock can have an effect on the control of waste. Older docks, both floating and graving, tend to be constructed with raised slides for bilge blocks. These produce a series of wide channels, usually six to ten feet wide, extending from the dock center line to the side. Debris from work in the dock collects in these channels and cannot easily be removed. Newer construction has favored flat dock surfaces, with keel and bilge blocks being moved by cranes. Debris can be more easily removed from docks of this construction. Facility size varies considerably. For graving docks this influences the volume of harbor water introduced during flooding and subsequently removed during dewatering. Floating drydocks, during sinking and refloating, are exposed to the normal flow of the body of water in which they are located, and actual contact of water with the floating dock may be many times the volume of water needed to flood a similarly sized graving dock. Table III-8 lists dock sizes and approximate volume (without vessel occupancy) for graving facilities contacted during this study.

Table III-8

GRAVING DOCK LENGTHS AND WATER VOLUMES

Length of Dock, Meters, (Feet)					Approximate Dock Volume, No Vessel, Million Cubic Liters, (Million Gallons)	
<122 (<400)	122-183 (400-600)	183-244 (600-800)	244-305 (800-1000)	>305 (>1000)		
X					3.8	(1.0)
	X				13.2	(3.5)
	X				13.2	(3.5)
		X			20.4	(5.4)
		X			21.2	(5.6)
		X			21.6	(5.7)
	X				23.8	(6.3)
	X				26.9	(7.1)
	X				27.3	(7.2)
	X				28.0	(7.4)
	X				28.4	(7.5)
	X				32.9	(8.7)
		X			34.1	(9.0)
	X				39.0	(10.3)
			X		42.2	(11.2)
		X			57.2	(15.1)
		X			57.2	(15.1)
		X			58.3	(15.4)
		X			59.8	(15.8)
			X		70.8	(18.7)
		X			73.4	(19.4)
		X			73.8	(19.5)
		X			79.9	(21.1)
				X	92.2	(24.1)
				X	111.3	(29.4)
				X	143.8	(38.0)
			X		173.4	(45.8)
				X	177.1	(46.8)
				X	190.4	(50.3)
				X	213.1	(56.3)
				X	244.1	(64.5)
				X	244.9	(64.7)
Totals:						
1	9	11	3	8		

SECTION IV

INDUSTRY CATEGORIZATION

INTRODUCTION

In the development of effluent limitations guidelines and recommended standards of performance for new sources in shipbuilding and repair drydocking operations, consideration should be given to whether the industry can be treated as a whole in the establishment of uniform and equitable guidelines or whether there are sufficient differences within the industry to justify its division into subcategories. For the shipbuilding and repair industry, the following factors were considered as possible justification for industry subcategorization: dockside and shipboard activities, facility age, salt vs. freshwater facilities, climate, and types of dock. After review, only salt vs. freshwater, and type of dock (graving docks and floating drydock) were found to have distinguishable characteristics.

INDUSTRY SUBCATEGORIZATION

Although there exist distinguishing characteristics, this document will apply to all types of docks with consideration given to site specific differences. Quantitative effluent guidelines, however, cannot be established at this time for drydocks because the nature of the discharge is not conducive to numerical monitoring.

There are such a wide range of dockside activities, nearly all of which are carried on to some degree in all shipyards, that dockside activities are not an acceptable criterion for subcategorization.

FACTORS CONSIDERED

Salt vs. Freshwater

Freshwater yards perform very little abrasive blasting compared with shipyards servicing saltwater vessels. Also, antifouling paints are not applied to freshwater ships. Since blasting is less common and usually on a much smaller scale, and the spent paint composition is different, shipyards servicing only freshwater vessels and those performing neither wet blasting to remove paint nor dry abrasive blasting should receive consideration with respect to their difference. Best Management Practices (See Section II) numbered 2, 5, 7 and 10 do not apply for facilities where wet blasting to remove paint or abrasive blasting does not occur.

Others

All other factors were rejected as bases for subcategorization. Since the major source of potential water pollution appears to result from blasting, the type of shipyard activities also was eliminated as a possible subcategory. Age of the facility does not directly affect the degree or composition of discharge. Because rainfall is unpredictable and occurs to some extent at all yards, climate also was rejected as a basis for subcategorization.

The type of dock, graving dock or floating drydock, also was considered and rejected as a subcategory. The same kinds of activities are undertaken in both types of docks and thus the same kinds of debris and discharges are produced. The only difference is that during flooding and deflooding, the water passes over the ends of and through scuppers along the sides of floating drydocks while it flows through one (or more) collector channels in graving docks and is discharged using pumps.

SECTION V

WATER USE AND WASTE CHARACTERIZATION

INTRODUCTION

This section describes the sources and uses of water by ships and industrial operations in drydocks. Potable water for use within drydocks is drawn from the same source that supports the rest of the shipyard, almost invariably the contiguous municipal system. Non-potable water is most frequently drawn directly from the adjacent navigable waterway.

Water requirements in a drydocking facility can be broadly classified as those necessary for the ship and those associated with the drydock. The former include potable water, cooling water, water for fire control, and other shipboard uses of water. All but potable water are usually supplied from harbor water. Drydock water uses are harbor water for flooding, hosedown of ship and dock surfaces, occasional wet blasting water, and dust scrubber water. Potable water is used in drydocks for tank cleaning operations.


Wastewaters similarly originate from both ship and drydock sources. Ship wastewater includes cooling water discharge, tank cleaning wastes, and occasionally boiler water discards. Drydock wastewater includes deflooding water, hydrostatic pressure relief water and gate leakage, rainwater, water used in hosedown, tank cleaning water, water from wet blasting if practiced, and any water entering the drydock from the ship or other sources.

Figure V-1 is a schematic of water and wastewater flows between a drydock, the drydocked ship, the drydock floor or deck, and the harbor. The figure represents a graving dock; however, if the flows indicated by asterisks are deleted, it also represents a floating drydock.

Not all flows are present in all drydocks. For example, potable water is supplied to vessels only if crews are on board. Hydrostatic pressure relief water is encountered in vast quantities in some graving docks, others are completely free of this stream.

In addition to water and wastewater flows, Figure V-1 shows materials entering the drydock as a result of the repair activities and the disposition of waste materials resulting from repair activities.

Table V-1 summarizes the observations made during the shipyard visits. The numbered streams in Figure V-1 are identified as to their presence or absence at each of yards A through F in Table V-1.

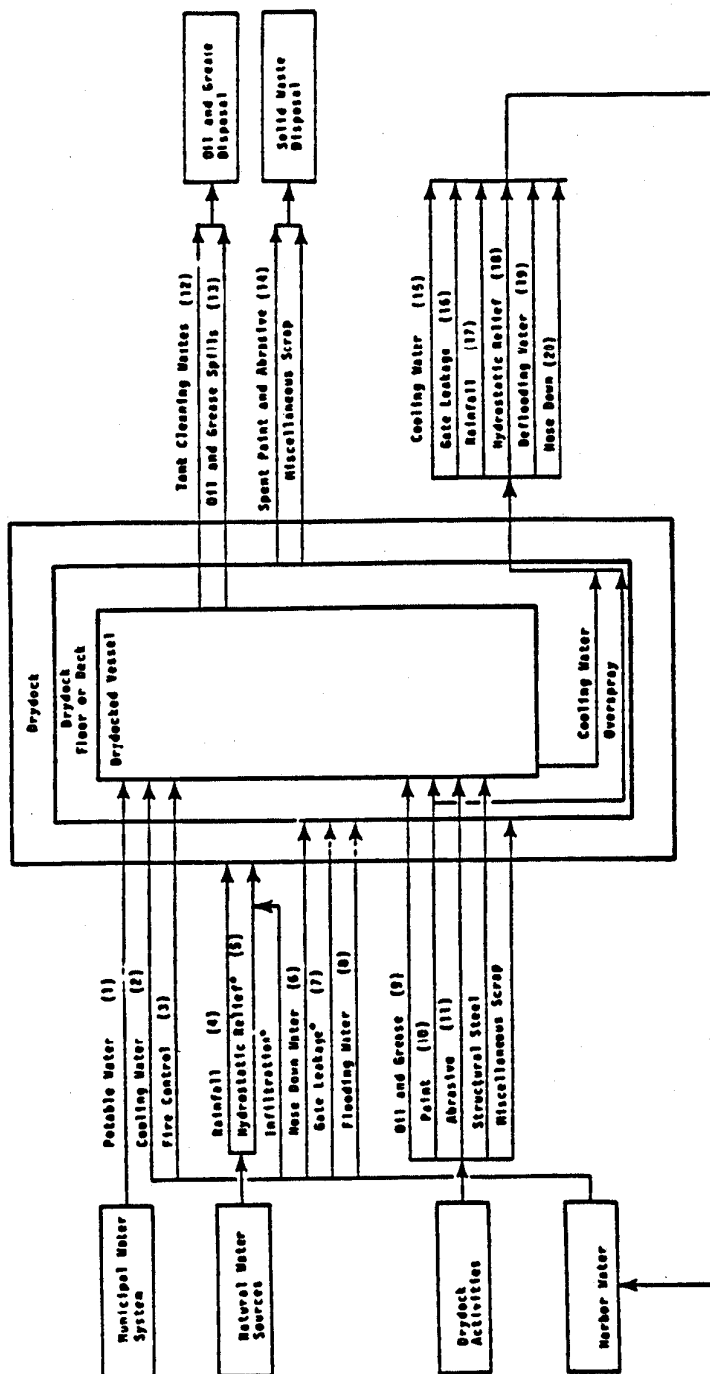

*Denotes flows not applicable to floating drydocks.

FIGURE V-1. Major Flows Associated With Drydocked Vessel

Table V-1. WATER AND WASTEWATER PRACTICES, SHIPYARDS
A THROUGH G

Water and Wastewater Flow Streams⁽¹⁾
In Shipyard Visited

Stream Number	SHIPYARD						
	A	B	C	D	E	F	G
<u>Water Into Dock</u>							
1	P	P	P	P	P	A	A
2	P	P	P	P	P	A	A
3	P	P	P	P	P	P	P
4	P	P	I	I	I	P	P
5	P	P	NA	P	P	A	NA
6	A	I	A	I	I	I	A
7	P	P	NA	P	A	I	NA
8	P	P	P	P	P	P	P
<u>Materials Into Dock</u>							
9	I	I	I	I	I	I	I
10	P	P	P	P	P	P	P
11	P	P	P	P	P	I	P
<u>Waste Materials to Disposal</u>							
12	I	I	P	P	I	I	I
13	I	I	I	I	I	I	I
14	P	P	P	P	P	I	P
<u>Wastewater to Harbor</u>							
15	P	P	P	P	P	A	A
16	P	P	NA	P	I	I	NA
17	P	P	I	I	I	I	P
18	P	P	NA	P	P	A	NA
19	P	P	P	P	P	P	P
20	A	I	A	I	I	I	A

P - Present, A-Absent, I-Intermittent, NA-Not Applicable to
Floating Drydock

(1) Refer to Figure V-1 for Stream Designation

SPECIFIC WATER USES

Water For On Board Ship Use

Once they have been placed in service, ships are equivalent to small towns with respect to their demand for water and the generation of wastewater discharges. The following subsections describe the source, use, and discharge of water for each of the several systems aboard ship.

Potable Water. Potable water is drawn from supporting facilities when in drydock. In addition to direct consumption by the resident population, it is used for food preparation and personal hygiene. The wastes from these uses become sanitary discharges which are covered by other regulations and will not be further considered in this document, except that they should be segregated from process wastewaters.

Fire Protection Water. While underway, fire protection water is drawn into the vessel from water being sailed upon. It is pressurized for use in the fire protection system. When in drydock, the supporting facility provides non-potable pressurized water for this purpose. These facilities are sometimes used to hose down the dock after dewatering or to help accumulate residual spent abrasive into piles.

Boiler Feed Water. Boiler feed water is either distilled from seawater or drawn from supporting facilities such as drydocks. This type of water is often required to be purer than potable water. In use, it is converted to steam in the boiler. The steam is then used to drive propulsion, electric generation, and other machinery as well as for heating purposes. Finally, the spent steam is condensed into water and fed back into the boiler to begin the cycle again. Since this is a closed cycle system there are not normally any discharges other than unintended leaks. A ship entering a drydock for maintenance and repair may occasionally have work done on the boiler while in drydock, and it may be necessary to drain the water from the boiler.

Cooling Water. Most of the water supplied to a ship in drydock for cooling is non-potable water. Freshwater cooled equipment normally uses a recirculating chilled water system in which little water is wasted. Cooling water is used as a flow through heat sink for air conditioners and various pieces of machinery and electronic equipment. Waste cooling water is discharged from the ship into the drydock in essentially the same condition as supplied except for temperature elevation (References 5 & 11).

Water For Industrial Use

Very little industrial wastewater is generated by the processes carried out in drydocks. However, large amounts of water may pass through the dock basin. Almost none of the drydocks in current use have design provisions for the segregation of contaminated and non-contaminated flows nor do they ensure isolation of non-contaminated flows with regard to possible contamination from contact with industrial process debris. This section will list and describe the source of all waters, except shipboard wastes, which can be potentially contaminated by flow through the drydock basin.

Launch Water, Graving Docks. As described earlier a graving dock basin is ordinarily flooded and dewatered twice for each ship docked. Water is admitted from the adjacent navigable waterway through the flooding culverts or through the caisson gate. The gate is removed, the ship is brought into or removed from the dock, the gate is replaced, and the water is returned to its source by pumping. The quality of the water on return, relative to the source, is dependent upon the condition of the admitted water and upon any material which may be added to or removed from it while in the drydock.

Launch Water, Floating Drydocks. There are two water flows involved in the sinking and raising of a floating drydock. Sinking and raising ordinarily happens twice for each ship docked.

The first water flow is that water admitted to the ballast compartments from the adjacent navigable water body to sink the dock. After the ship is brought into or removed from the dock, water is pumped from the ballast compartments back to the source body, without further contamination, to raise the dock. The return flow may be of better quality than the source since the ballast compartment may serve as a settling tank.

The second water flow is source body water flowing through the open ends of the U-shaped trough of the dock and over the pontoon deck as the dock is sunk. As the dock is raised, water flows out through the ends and other openings of the drydock and returns to the source body. The quality of the return flow, relative to the source, is dependent upon the amount and type of debris that is present on the side wall and pontoon deck surfaces prior to sinking as well as upon the time of exposure and rate of runoff during dewatering.

Wash Down. When a graving dock is flooded, it simulates a large settling tank. Silt and mud which enter the dock with the flooding water deposit on the floor following dewatering. Marine organisms may be trapped inside the dock basin when the caisson is replaced for dewatering. If the dock is not cleaned after dewatering, the dead marine organisms begin to decay and the silt and mud becomes very

difficult to remove (Reference 11). In those facilities where these problems occur, the drydock floor and other surfaces are hosed with water from the pressurized non-potable system. Existing practices generally may include hosing (1) after initial dewatering and (2) prior to final flooding. These practices were observed in two of the seven shipyards visited. There are other times of intermittent hosing. For instance, water from drydock and ship hosing generates liquid industrial waste and, in addition, may convey solid wastes to the drainage tunnel for direct discharge to the receiving waterbody.

Washdown also occurs occasionally after clean up. Solid wastes remaining after mechanical and manual clean up efforts may be flushed by hosing into the drainage tunnel or mixed with flooding waters on the dock floor during the undocking cycle (Reference 6).

Washdown in a floating drydock is identical to that in a graving dock except that the wastes are discharged over the side of the dock instead of into the drainage tunnels.

Integrity Testing. Whenever any repair work is performed on the structure, fittings of a pressure vessel such as boilers, or whenever repair work involves penetration of ship's hull for weld repair of cracks or similar procedures, the final step in the process must be a test to demonstrate the strength or watertight integrity of the completed repair.

Although it is not necessary that a ship be in drydock to perform repairs to pressure vessel equipment, this kind of work is frequently performed while a ship is drydocked. The usual procedure for hydrostatic testing of pressure vessel equipment starts with a water rinse of the inside walls. The quality of water used depends on the type of equipment. Obviously, non-potable water is not permitted to enter a potable water system. Next, the equipment is filled with water of appropriate quality. Air is applied at test pressure and the equipment examined for leaks. The rinse and test water might be discharged to the drydock but is more likely to be dumped to a holding tank on the ship for later use.

When repairs involving penetration of the hull of ship are performed, the watertight integrity of the completed repair is usually tested in two ways. The first and preliminary method is to apply a stream from a high pressure fire hose on the repaired area while examining the other side for leaks. The final method of testing is performed as a part of the undocking cycle. When the water level reaches a point just prior to floating the ship off of the blocks flooding or sinking is stopped while a thorough inspection for leaks is made inside the ship with particular attention to repaired areas.

PROCESS WASTE CHARACTERIZATION

Ship Originating Wastes

When a ship is drydocked, the quantity of wastewater generated depends upon the expected length of stay in dock and upon specific operations being performed on the ship during the docking cycle. Generally, ships drydocked for short periods and minor repairs operate as if they are berthed at a pier. They require potable and non-potable water and generate wastewater. On other occasions when ships are drydocked for extensive overhaul, they may use little or no water. At the beginning of the docking period, the consumption of water for such purposes as cooling is at its peak. As systems that use water are shut down, water use decreases. A ship undergoing maintenance on its non-potable water system or with its crew disembarked may use no water.

After the dock is dewatered, threaded studs are spot-welded onto the ship's hull, and metal scupper boxes are bolted on at each water discharge location. Soil chutes then are hoseclamped onto the scupper boxes and suspended from the hull. Soil chutes are flexible hoses usually made of rubber-coated nylon or canvas. The lower end of each soil chute is fastened to the appropriate disposal system; for example, cooling water to dock overboard discharge systems. Enough slack is left in the chute so it can be pushed aside if it interferes with rolling equipment. If soil chutes are properly maintained, this system is an effective means of segregating and carrying away ship's wastewater. It would be desirable for the industry to adopt a uniform standard for hose connections so as to eliminate connection leakage.

Cooling Water. As mentioned in the paragraph on Cooling Water, except for a slight temperature increase, non-contact cooling water is discharged from the ship into the drydock in essentially the same condition as supplied from the drydock non-potable water main. Reference 5 reports the following measurements taken at one West Coast facility: nonpotable water supplied at 55°F; non-contact cooling water discharged at 58°F; drainage sump temperature measured at 60°F; and groundwater infiltration, in comparable volume to the cooling water discharge, at 70°F.

Boiler Water. When ship's boilers are to be out of service for short periods, the preferred practice is to keep them completely full of very pure water. Under these conditions, there is no discharge. In some cases, during maintenance or repair work performed on the boiler while a ship is in drydock, it may be necessary to pump the water out of the boiler. This one-time discharge will be slightly alkaline and contain a mixed sludge made up of phosphate and carbonate. The volume of this one-time discharge is approximately twice the steaming capacity of the boiler.

Bilge Discharges. Pumping oily wastewater overboard from bilges is prohibited by Coast Guard Regulations. If an accidental discharge should occur, it is treated as an oil spill within the drydock and clean up is performed before discharge to ambient waters. If an oil spill occurs during flooding or dewatering operations, the operation is stopped until the oil spill is cleaned up.

Other. Although there are other discharges from the ship, such as wastes from the cleaning of tanks and voids, they are generated by drydock industrial activity rather than ship operations and are therefore discussed in Hull Cleaning Waste below.

Dock Originating Wastes

Hull Cleaning Waste. Several methods are used to remove paint, rust, and marine growth, such as barnacles and algae, from the metal surfaces of ship hulls. In all types of surface preparation, the old paint, rust, and marine organisms are found mixed in the spent blasting media. The surface preparation methods are dry abrasive blasting, hydroblasting, wet blasting, water cone blasting, and chemical paint stripping. Surface preparation methods, other than dry blasting, are not common in the industry. Hydroblasting is being tried at three of the shipyards contacted. Wet blasting and water cone blasting is confined principally to Navy ships having special coatings. Chemical paint stripping is rare and is used only on small, localized areas made of more delicate materials. Each method is explained in greater detail below.

Dry abrasive blasting (sandblasting, grit blasting), is the most common method of surface preparation. This method is used in varying degrees by 95 percent of shipyards contacted. When employed, spent abrasive is the principal source of solids in the drydock discharge. Particle sizes of the used grit range from fine dust to whole bits of abrasive, approximately one-eighth inch in diameter. Some of the spent grit falls directly into drainage gutters, especially if a ship is large and the hull sits over the drains. The potential also exists for the abrasive to be washed into the drains from storm runoff, shipboard wastewaters dumped on the dock, hosing, seepage, or other sources of water. The spent grit is, for the most part, settleable.

Sometimes, sand is used as the abrasive, instead of utility slag or copper slag. Delicate equipment, such as sonar domes, are occasionally sand blasted. Rare aluminum-clad hulls are often blasted with sand instead of grit to minimize metal erosion during blasting. One problem with using sand instead of slag is the airborne particulates which are high in silica. The major water pollution problem from sand usage is the possible discharge of solids in the waste stream.

The major pollution problem from hydroblasting (Reference 1) is that the volumes of water used increase the potential that the paint and grit will be flushed into the drainage discharge. Any spilled oil or solvents used elsewhere might be washed into drainage gutters. Since oxidation of the surface of the hull of the ship will prevent a good bond between the fresh paint and metal, rust inhibitors, which contain compounds such as sodium nitrite and diammonium phosphate, are used. (In fact, dry grit blasting is not performed during rainfall so that metal will not rust during or after blasting). Antifreeze may be added to the spray. This will be discharged into the wastewater streams along with the blasting water. Hydroblasting is not preferred by ship repair facilities, because the resulting surface obtained is not as suitable for paint adhesion as the surface obtained by dry grit blasting.

Wet blasting uses a mixture of grit and water. The water acts as the propulsion medium. The solids discharge potential, which is characteristic of dry grit blasting, exists as well as the aforementioned problems of hydroblasting.

Paint may be chemically stripped, rather than blasted, from more delicate apparatus such as sonar domes, antennas and deck machinery. Small articles may be dipped in some yards. Chemical paint stripping was not reported as being used in drydocks by any of the shipyards contacted or visited.

Spent Paint, Rust, and Marine Organisms. Spent paint containing the priority pollutants copper, zinc, chromium, and lead, along with iron oxides and marine organisms are removed from the ships during blasting. The paint contributes to the solid load in the waste stream as well as being subject to contact with stormwater, flooding waters, hose water, and water spills. Additionally, it can be washed, pushed, or blown into uncovered drains.

Antifouling paints are of particular concern. Toxic constituents, such as copper or organotin compounds are used in these paint formulations. Rust and marine growth removed from the sides of the ship may increase quantities of solids in the waste stream.

Fresh Paints and Solvents. Fresh paints contain a variety of metals, such as copper, zinc, chromium and lead, as well as hydrocarbons which are not present in the used paint removed from the ship's hull. Solvents generally are hydrocarbon based. Paints and solvents may be washed into drains; occasionally they are mixed directly over drains with spillage falling into the drains. Overspray from the painting operation is estimated to be between one and two percent. Paint was observed floating in discharge streams at one facility visited. Organotin paint applications were not observed in any of the shipyard visits.

Generally two types of paints are used on ship's hulls: antifouling and anticorrosive. Antifouling paints are toxic to prevent the growth of marine organisms. Cuprous oxide based paints have been used for this purpose for many years. Increased attention has been recently given to the use of organotin antifouling paints. Although the effects of organotin are not well documented, these compounds are reported to be more effective antifoulants than copper based paints, and require a lower percentage of toxic constituents.

There is a trend toward epoxy-based anticorrosive paints replacing vinyl and vinyl-lead based coatings. Pigment materials such as lampblack, red-iron-oxide, and titanium dioxide are added to these paints. Anticorrosive additives are included in epoxy-based or vinyl base paints, usually in the form of zinc dust.

Grease and Oils. The major source of grease and oils is fuel oils and lubricants spilled on drydock floors. Spills most frequently occur when fuel and oils are transferred. Leaky hoses and connections, overflow of containers, and general carelessness contribute to spillage. When stripping fuel tanks, compartments, and when machinery is repaired, or a tank ruptures, oil and grease pollution potential increases. Spills can occur during refilling of fuel tanks at the conclusion of the drydock operations. It is reported that spills over 100 gallons are rare.

Stormwater Runoff. Stormwater is a totally uncontrollable source of wastewater in drydocks. No method of confining rainfall within the dock exists. Channels have been used to direct the water from the dock floor. The major contribution of stormwater to wastewater loads is to increase the quantity of discharge. When heavy and sustained rainfalls occur, stormwater may transport solids to the drains. Some drydocks located in dry climates have essentially no problems due to rainwater.

Dock and Gate Seepage. Another source of wastewater is leakage around the caisson gate of graving docks. This flow of harbor water into the dock can be caused by deterioration of the gate seals or by large pieces of refuse being trapped between the gate and the dock when the caisson is replaced before dewatering. This water flows across the floor and into the drainage system. Some graving docks are designed to allow relief of hydrostatic groundwater pressures through the sidewalls and floor. Relief waters also flow across the floor and into the drain system.

In some dock designs this water is isolated from the dock floor via dams and drains and is channeled directly into the drainage trenches. Flows approaching 100 gal/minute are not uncommon. Floor originating relief waters commonly flow across the dock basin and into the drainage system.

Cleaning Waste. Detergents are used to clean water tanks, bilges, and fuel tanks. The detergents are combined with diesel oil in a one to ten ratio. After cleaning, tanks are rinsed with hot water. This process is a source of oil and grease as well as nitrogen and phosphorus compounds.

On rare occasions, delicate equipment, such as antennas and sonar domes, may be cleaned with detergents prior to painting.

Trash. Cans, paper, bottles, rags, welding rods, scrap metal, and pieces of wood are examples of trash found on a drydock floor prior to flooding. During dewatering, some of these wastes may be flushed out of the docks if they have not been removed.

QUANTITATIVE DATA

During the past several years, monitoring programs have been conducted at several shipyards. Some of the studies were performed by the shipyards while others were conducted by the government. Effluents from two shipyards were sampled for this document and the results of all of these studies are compared in this section. Additionally, leaching studies are analyzed as well as the results of a sieve analysis of abrasive collected at one shipyard. Also included in this section is a discussion of the difficulties and limitations of effectively monitoring shipyard effluents.

Sampling Results

Tables V-2 through V-10 indicate ranges and medians of results obtained during various sampling programs at shipyards A, B and D. Tables V-7 and V-10 combine the results of all data from Shipyards A and D respectively according to different aspects of the effluent discharge.

Table V-2, for Shipyard A is derived from NPDES monitoring conducted by shipyard personnel. A monthly grab sample of the harbor water was obtained at the time of flooding. While a ship was docked, multi-day composites were collected at drainage pump discharges.

Several sets of data exist for Shipyard B. Both shipyard and EPA test results of the same sampling program are summarized (Tables V-3 and V-4). This monitoring occurred during research for the Denver Rationale (Reference 2). Major differences in results are probably due to variations in laboratory techniques. For example, chromium levels found in the EPA results of the split sample are much higher than shipyard findings. This is due to the use by EPA of a glass fiber filter and a Whatman #1 paper filter during sample preparation. Additionally, limits on the accuracy of the testing methods may

explain discrepancies such as higher values for dissolved solids than the corresponding total solids.

Heavy blasting and extensive painting of the docked vessel occurred during the sampling period. Because the purpose of these tests was to prepare the Denver study (Reference 5), and was prior to the issuance of NPDES permits, extensive clean up was not dictated.

Grab samples were collected and composited during initial and final flooding and dewatering, a total of four composited samples. Also, two sequential samplers programmed to draw one sample per hour were used to gain composited daily drainage samples.

NPDES permit monitoring data on dock drainage was available for a thirteen-month period beginning February 1975. The shipyard initiated clean-up practices only during the final month, February 1976. The drainage pump discharge was sampled once per month by yard personnel. Two or three grab samples were taken during a pump cycle and composited (see Table V-5).

Hittman Associates, under contract to EPA, conducted a sampling study in April 1976. Grab samples of the harbor water were collected prior to initial flooding and of initial and final flooded docks. Also, a grab sample was obtained at every two-foot drop in the water level during the initial and final dewaterings. These samples were then composited. Additionally, combined samples were collected and documented during drainage pump cycles throughout the monitoring period. Table V-6 presents the results of these tests.

During sampling at shipyard B, a "very light sand sweep" (32 to 35 tons of grit) of the docked ship, an ore carrier, took place, followed by anticorrosive touch-up painting, and application of antifouling paint. The hull was blasted to the light load line only. Hoses were used to transport most of the shipboard waters to drain channels. At times, cooling water fell directly on the dock floor. Clean up, using manual shovels and front end loaders, took place just prior to flooding and undocking of the ship.

Comparison of the various test results presents few contradictions. In nearly all cases, the minimum and median values were consistent. On rare occasions, high values did differ considerably. Table V-7 composites the data on Shipyard B. Regardless of the extent of painting, effluent levels remain constant. There is no apparent significant change in Shipyard B's NPDES monitoring data during, before, and after clean-up procedures were initiated. It is, therefore, concluded that the nature of the discharge is not conducive to numerical monitoring.

Data for Shipyard D include both NPDES monitoring for 1975 (Table V-8) and sampling from May 1976 conducted for EPA (Table V-9). Shipyard personnel sampled during the second or third week of each month. The date was chosen and sampling occurred regardless of shipyard activity or weather conditions. Two samples were collected from each drain discharge, separately composited, and reported to fulfill NPDES permit requirements.

The May 1976 sampling thoroughly covered the docking procedure, including drainage discharges, regularly for ten days until the dock had been cleaned. Manual shoveling and sweeping, use of front loaders, and occasional hosing were performed to clean up 150 tons of spent abrasive used during the blasting to bare metal of the complete hull of a medium-sized Navy ship. Use of a closed cycle side blaster on about 25 percent of the ship's hull limited the abrasive tonnage. Anticorrosive paint was then applied immediately to the ship's hull. Antifouling paints were not applied during this sampling period.

The sampling program included samples of the harbor water prior to flooding as well as two additional harbor samples during the monitoring period.

Table V-2. SUMMARY OF NPDES MONITORING AT SHIPYARD A
AUGUST 1975 THROUGH SEPTEMBER 1975

<u>Parameter</u>	<u>Harbor Water</u>		<u>Drainage Water</u>	
	<u>Range</u>		<u>Range</u>	
	<u>High</u>	<u>Low</u>	<u>High</u>	<u>Low</u>
pH	6.9	6.7	7.0	6.8
Suspended Solids	9.0	6.0	10.0	10.0
Settleable Solids	<0.1	<0.1	0.1	<0.1
oil and Grease	8.2	1.2	43.82	1.71
PbT	<0.05	<0.04	<0.05	<0.04
PbD	<0.05	<0.04	<0.05	<0.04
CrT	0.02	<0.03	<0.03	0.02
CrD	0.03	<0.02	<0.03	0.01
CuT	0.47	0.2	0.54	0.36
CuD	0.04	0.03	0.04	0.04
SnT	<0.7	<0.4	<0.7	<0.4
SnD	<0.7	<0.4	<0.7	<0.4
CdT	<0.01	<0.01	<0.01	<0.01
CdD	<0.01	<0.01	<0.01	<0.01
ZnT	0.149	0.054	0.125	0.049
ZnD	0.066	0.027	0.04	0.038
AsT	0.02	<0.01	0.04	<0.01
AsD	0.02	<0.01	0.04	<0.01
HgT	0.0035	0.0025	0.018	0.0002
HgD	0.0007	0.0004	0.0005	0.0004

All values except pH are in mg/l.

Table V-3. SUMMARY OF SHIPYARD TEST RESULTS
OF EPA/SHIPYARD MONITORING AT GD #B-3 AT SHIPYARD B
MAY 1974

Parameter	Initial Fill	Initial Dewatering	Drainage Discharge Range			Final Fill	Final Dewatering
	Value	Value	High	Low	Median	Value	Value
pH	7.1	7.1	7.7	7.2	7.5	7.9	7.7
Suspended Solids	30.3	35.0	19,312.0	14.0	0.49	85.0	44.0
Settleable Solids	No Results	No Results	200.0	<0.1	0.2	<0.1	<0.1
PbT	<0.05	<0.05	13.0	<0.05	0.21	0.075	<0.05
PbD	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05
CrtT	0.61	0.61	0.50	<0.25	0.34	<0.025	<0.025
CrtD	0.45	0.45	0.79	<0.25	0.56	<0.025	<0.025
CuT	<0.1	<0.1	60.0	<0.1	0.34	<0.25	<0.25
CuD	<0.1	<0.1	<0.25	<0.1	<0.1	<0.25	<0.25
SnT	0.11	0.11	0.204	<0.1	<0.1	<0.1	<0.1
SnD	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
CdT	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05
CdD	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05	<0.05
ZnT	<0.1	<0.1	4.7	0.17	0.42	0.23	<0.1
ZnD	<0.1	<0.1	0.15	<0.1	0.11	<0.1	<0.1
AsT	<0.02	<0.02	0.19	<0.02	<0.02	0.15	0.12
AsD	<0.02	<0.02	0.15	<0.02	<0.02	0.09	0.062
HgT	<0.0025	<0.0025	0.056	<0.0025	0.0035	0.0088	<0.0025
HgD	<0.0025	<0.0025	<0.0025	<0.0025	<0.0025	<0.0025	<0.0025
FeT	1.42	1.42	1,250.0	1.8	5.5	4.2	1.5
FeD	<0.1	<0.1	0.16	<0.1	<0.1	<0.1	<0.1
Flow (m ³ /day)			(579.2)	(344.5)	(344.5)		
Flow (gal/day)			153,000	91,000	97,000		
Volume of flooded drydock = 1.1 x 10 ⁵ m ³ (28.6 x 10 ⁶ gallons).							
All values except pH are in mg/l.							

Table V-4. SUMMARY OF EPA TESTING OF
EPA/SHIPYARD MONITORING OF GD #B-3 AT SHIPYARD B
MAY 1974

Parameter	Initial Fill	Initial Dewatering	Drainage Discharge Range			Final Fill	Final Dewatering
	Value	Value	High	Low	Median	Value	Value
Suspended solids	2.0	2.0	20.0	2.0	6.0	6.0	3.0
PbI	<0.01	<0.01	13.0	<0.01	0.11	0.2	<0.01
PbD	<0.01	<0.01	1.2	<0.1	<0.1	<0.01	0.01
CrI	0.02	0.02	1.0	0.02	0.02	0.04	0.04
CrD	0.03	0.02	0.12	0.01	0.02	0.03	0.04
CuI	0.06	0.07	29.0	0.1	0.25	0.13	0.06
CuD	0.03	0.08	4.5	0.06	0.15	0.08	0.11
SnI	5.0	5.0	4.0	<0.2	2.0		
SnD	5.0	4.0	3.0	<0.2	2.0	0.05	0.07
CoI	0.05	0.05	0.09	0.01	0.03	0.04	0.05
CoD	0.07	0.05	0.05	0.02	0.03	0.5	0.32
ZnI	11.0	0.11	39.0	0.24	0.27	0.12	0.14
ZnD	12.0	0.14	4.1	0.16	0.26	<0.0001	<0.0001
HgI	<0.0001	<0.0001	0.0003	<0.0001	0.0001	<0.0001	<0.0001
HgD	<0.0001	<0.0001	0.0001	<0.0001	<0.0001	<0.0001	<0.0001
Flow (m ³ /day)			54.5	34.1	43.0		
(gal/day)			144,000	90,000	95,000		

Approximate volume of filled drydock = 1.1×10^5 m³ (28.6 x 10⁶ gallons).
All values except pH and flow are in mg/l.

Table V-5. SUMMARY OF NPDES MONITORING OF
DRAINAGE DISCHARGE OF SHIPYARD P
FEBRUARY 1975 THROUGH FEBRUARY 1976

	GD #B-3 and #B-6				GD #B-5 and #B-7				GD #B-1 and #B-4			
	Range				Range				Range			
	High	Low	Median		High	Low	Median		High	Low	Median	
pH	7.9	7.3	7.6		8.3	7.5	7.8		8.8	7.3	7.9	
Suspended Solids	62.3	16.6	55.1		120.0	3.6	56.0		61.5	2.8	23.0	
Settleable Solids	3.0	<0.1	0.1		0.2	<0.1	0.1		0.3	<0.1	<0.1	
Oil and Grease	6.3	<0.1	1.3		5.6	0.65	1.2		2.8	0.22	0.6	
PbI	0.64	<0.1	<0.1		0.27	<0.1	<0.1		0.19	<0.1	<0.1	
PbD	<0.1	<0.1	<0.1		0.14	<0.1	<0.1		0.14	<0.1	<0.1	
CrI	0.18	<0.1	<0.1		0.13	<0.1	<0.1		0.14	<0.1	<0.1	
CrD	0.12	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
CuI	1.2	0.1	0.15		0.75	<0.1	0.11		0.33	<0.1	0.12	
CuD	<0.1	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
SnI	<0.1	<0.1	<0.1		0.21	<0.1	<0.1		<0.1	<0.1	<0.1	
SnD	<0.1	<0.1	<0.1		0.11	<0.1	<0.1		<0.1	<0.1	<0.1	
CdI	<0.1	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
CdD	<0.1	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
ZnI	2.05	0.29	0.33		0.85	0.13	0.3		0.18	<0.1	0.11	
ZnD	0.13	<0.1	0.16		0.21	<0.1	<0.1		<0.1	<0.1	<0.1	
AsI	<0.1	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
AsD	<0.1	<0.1	<0.1		<0.1	<0.1	<0.1		<0.1	<0.1	<0.1	
HqI	<0.0025	<0.0025	<0.0025		<0.0025	<0.0025	<0.0025		<0.0025	<0.0025	<0.0025	
HqD	<0.0025	<0.0025	<0.0025		<0.0025	<0.0025	<0.0025		<0.0025	<0.0025	<0.0025	
Flow (m ³ /day)	5,300.0	2,044.1	3,572.4		4,542.7	1,135.6	2,649.6		8,327.9	4,921.0	7,570.8	
(gal/day)	1,400,000	540,000	930,000		1,200,000	300,000	700,000		2,200,000	1,300,000	2,000,000	
Number of Samples	13				13				13			

All values except pH and flow are in mg/l.

**Table V-6. SUMMARY OF CONTRACTOR'S
MONITORING AT SHIPYARD B
APRIL 1976**

Parameter	Harbor Water	Initial Fill	Initial Dewatering	Drainage Discharge			Final Fill	Final Dewatering
	Value	Value	Value	High	Low	Median	Value	Value
pH	7.9	8.1		8.0	7.7	7.8	7.8	7.8
suspended solids	12.0	41.0	43.0	68.0	13.0	24.0	26.0	41.9
Settleable Solids	0.0	0.0	0.0	0.4	0.0	0.0	0.0	TRACE
Oil and Grease	<5.0	<5.0	<5.0	9.3	<5.0	5.0	5.3	<5.0
PbI	0.26	0.25	0.39	0.37	0.2	0.31	0.25	0.31
PbD	0.26	0.25	0.16	0.23	0.16	0.19	0.25	0.31
CrI	<0.1	<0.1	<0.1	0.1	<0.1	<0.1	<0.1	<0.1
CrD	<0.1	<0.1	<0.1	0.1	<0.1	<0.1	<0.1	<0.1
CuI	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
CuD	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
SnI	<2.0	<2.0	2.0	4.0	<2.0	3.0	3.0	<2.0
SnD	<2.0	<2.0	2.0	3.0	<2.0	<2.0	2.0	<2.0
CdI	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
CdD	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
ZnI	<0.02	<0.02	<0.2	4.0	<0.02	0.3	0.1	0.5
ZnD	<0.02	<0.02	<0.02	0.1	<0.02	0.02	0.1	0.1
MnI	<0.06	0.1	0.1	0.2	0.06	0.1	0.06	0.1
MnD	<0.06	0.06	0.06	0.1	<0.06	0.06	0.06	0.1
AsI	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02
AsD	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02
HgI	0.0031	0.0027	0.0036	0.0021	0.0012	0.0015	0.001	0.0017
HgD	0.0031	0.0027	0.0008	0.0021	0.0011	0.0015	0.001	0.0017
NiI	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
NiD	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
AlI	<1.0	<1.0	<1.0	1.6	<1.0	<1.0	<1.0	<1.0
AlD	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
FeI	0.3	1.0	1.2	2.6	0.4	1.1	1.1	0.9
FeD	<0.1	<0.1	<0.1	0.1	<0.1	<0.1	<0.1	<0.1
Flow (m ³ /day)								
Flow (gal/day)								
				3,028.3				
				800,000				

volume of filled drydock = $8.3 \times 10^6 \text{ m}^3$ (22×10^6 gallons).
All values except pH and flow are in mg/l.

SUMMARY OF ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED DATE 01-21-2001 BY 60322 UCBAW

All values except PM are in mg/l.

Numbers in parentheses () indicate number of tests performed if different from "Number of Tests".

Table V-8 SUMMARY OF NPDES MONITORING
OF DRAINAGE DISCHARGES AT SHIPYARD D
JANUARY 1975 THROUGH DECEMBER 1975

Parameters	Harbor Water			GD #D-2			GD #D-3			GD #D-4		
	Range		Median	Range		Median	Range		Median	Range		Median
	High	Low		High	Low		High	Low		High	Low	
pH	NR	NR	NR	7.9	6.9	7.6	8.1	7.5	7.7	7.8	7.5	7.7
Suspended Solids	19.0	1.7	5.6	20.0	4.4	9.1	22.0	3.2	10.0	32.0	3.2	16.0
Settleable Solids	NR	NR	NR	0.3	0.0	0.0	0.1	0.0	0.0	0.1	0.0	0.0
Solids	NR	NR	NR	4.0	0.0	2.0	3.4	0.0	0.2	3.8	0.0	1.3
Oil & Grease	NR	NR	NR	0.7	<0.01	<0.05	0.6	<0.01	<0.04	0.58	<0.01	<0.02
PbT	NR	NR	NR	0.27	<0.1	<0.1	0.34	<0.01	<0.05	0.2	0.0	0.03
CrT	NR	NR	NR	1.2	<0.05	0.21	1.6	0.07	0.25	4.1	0.1	0.27
CuT	1.4	<0.05	0.12	<1.0	0.03	<0.1	<1.0	0.03	<0.7	<1.0	<0.01	<0.5
SnT	NR	NR	NR	1.8	0.02	0.6	1.2	0.1	0.5	1.1	0.03	0.28
ZnT	1.6	0.02	0.29	3.2	0.02	0.39	3.0	0.13	1.0	3.0	0.13	0.91
FeT	0.39	<0.01	0.07									
Flow (m ³ /day)				1135.6	1135.6	1135.6				473.2	473.2	473.2
(gal/day)				300,000	300,000	300,000				125,000	125,000	125,000

All values except pH and flow are in mg/l.

NR = No Result

Table V-10 SUMMARY OF ALL HARBOR AND
DRAINAGE DISCHARGE MONITORING AT SHIPYARD D

Parameter	Harbor Water			Drainage Discharge		
	High	Range Low	Median	High	Range Low	Median
pH	9.3	8.4	9.0	9.1	6.9	7.9 (2)
Suspended Solids	200.0	1.7	6.0	166.0	3.2	17.0 (2)
Settleable Solids	TRACE	0.0	0.0	0.3	0.0	0.0 (2)
Oil & Grease	<5.0	<5.0	<5.0	<5.0	0.0	3.2 (2)
PbT	0.57	0.36	0.43	0.57	0.01	0.07(2)
PbD	0.57	0.36	0.42	0.50	0.32	0.4
CrT	0.1	<0.1	<0.1	0.27	<0.01	<0.1 (2)
CrD	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
CuT	1.4	<0.05	0.12(2)	4.1	0.03	0.2 (2)
CuD	<0.1	<0.1	<0.1	0.3	<0.1	<0.1
SnT	3.4	<2.0	2.1	3.7	0.01	<1.0
SnD	2.1	<2.0	<2.0	2.9	<2.0	<2.0
CdT	0.06	0.05	0.05	0.06	<0.03	<0.04
CdD	0.05	<0.03	0.05	0.06	<0.03	<0.04
ZnT	1.6	<0.02	0.19(2)	2.0	0.02	0.28(2)
ZnD	0.45	<0.02	<0.1	0.36	<0.02	0.05
MnT	0.14	<0.06	0.1	1.83	0.25	1.43
MnD	0.1	<0.06	0.07	1.79	0.21	1.4
AsT	0.05	<0.02	<0.02	0.04	<0.02	<0.02
AsD	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02
HgT	0.0014	0.0013	0.0014	0.0019	<0.0001	<0.0009
HgD	0.0014	0.0006	0.0013	0.0019	<0.0001	0.0008
NiT	0.36	0.24	0.36	0.35	<0.2	<0.2
NiD	0.36	0.24	0.36	0.35	<0.2	<0.2
AlT	<1.0	<1.0	<1.0	1.1	<1.0	<1.0
AlD	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
FeT	0.39	<0.01	0.07(2)	3.7	0.02	1.3
FeD	0.2	0.2	0.2	2.1	0.6	0.8

All values except pH are in mg/l.

(2) Indicates both contractor and NPDES monitoring.
All other results are only contractor results.

A grab sample of the flooded dock was collected and a composite of samples collected at each two-foot water level drop was made during dewatering. Samples were taken of the drainage water during hosedown following initial dewatering and regularly throughout the monitoring period. Every two minutes during the pumping cycle, samples were drawn and composited.

During the May 1976 sampling program at Shipyard D, the harbor water was actually higher in certain constituents, such as total suspended solids and pH, than in the NPDES tests. No significant increases occurred between corresponding influents and effluents. As in samples at other shipyards, discharge levels tend to be very low with rare "high" values of certain parameters. It could not be established that dockside activities affect discharge levels. As in the case of Shipyards A and B, constituent levels remain constant throughout. Only levels of manganese varied from the harbor water concentrations. In all likelihood, this can be attributed to groundwater infiltration since no other major source of manganese is apparent. The results again lead to the conclusion that the nature of the discharge is not conducive to numerical monitoring.

Several obstacles exist with respect to conducting an accurate sampling program of floating drydocks and/or graving docks. Some of these problems are due to the nature of the operation and drydock design. Other difficulties occur during interpretation of the data.

- o The physical design and operation of a floating drydock is not conducive to conducting an effective sampling program. During submersion of the dock, potential contaminants such as grit and paint might be flushed from the surface of the dock, rather than discharged through a single sampling point such as a pipe or sewer, as in the case with graving docks.

When the dock is submerged, grit, spent paint, oil and grease, and other dockside wastes may be flushed or may float from the dock floor. Any spills, stormwater, or discharges onto the floated dock floors will randomly run off the ends and through scuppers along the sides of the floating drydock. Since there are multiple discharge points, accurate sampling is not feasible.

- o Because only total drainage discharges were monitored on a daily basis, it is difficult to attribute constituents and flows to any individual source or operation. For example, variations in flows and composition of cooling water and degree of hydrostatic relief might occur concurrently with an operation such as blasting or painting. Any alteration in drainage discharge would be difficult to correlate with these activities.

Shipyard D management once attempted to estimate all drydock discharge parameters and levels but were unable to determine the source of some of the contaminants. The problem obviously is complex.

- o Insufficient documentation of sampling programs performed prior to this contract makes interpretation of previous monitoring questionable. By failing to explain what shipyard operations were in progress, weather conditions, floor conditions, and especially analytical procedures, interpretation and comparison of monitoring data is difficult.
- o The lack of a "typical" daily dock operation means that all data obtained is particular to that specific day and is not necessarily representative of the usual drydock discharges. Consequently interpretation of the data is difficult. This restricts determination of sources and establishment of recommendations.

Leaching Studies

Studies of the leachability of the fresh abrasive and spent abrasive and paint were done at several shipyards. The experiments are discussed below.

Leaching Study #1 consisted of an experiment in which 400 grams of spent abrasive collected from a shipyard facility were mixed with a liter of seawater. The combination was shaken intermittently. A 100 ml aliquot was withdrawn after two days one inch below the surface. Another aliquot was withdrawn after eight days. The method of analysis was not defined. The two aliquots produced no difference in concentrations of Cd, Cr, Zn, Cu, and Sn. Only levels of lead showed a significant increase.

The results of leaching Study #2 present markedly different conclusions. These tests performed by EPA indicate that the spent abrasive may actually act as an adsorbent of metals already present in the water. Approximately 100 grams of spent abrasive collected at five different shipyards were each exposed to approximately one liter of seawater from the local bay. An analysis indicated that cadmium, chromium, lead, and tin levels all either remain the same or decreased. Only copper and zinc exhibited any increase in concentration.

Leaching Study #3 resulted in no major change in nickel, zinc, tin, or cadmium. Slight increases in chromium, copper, iron, and lead levels occurred, but mercury concentration was reduced 98 percent.

The data for Leaching Study #4 was much more thorough. Seven spent abrasive samples and two fresh abrasive samples were subjected to a leaching test in seawater. A level of pollutant was determined after exposure of 300 hours and 700 hours. Only lead concentrations markedly increased with each sample. Copper and zinc levels increased significantly on occasions, but otherwise remained constant. Arsenic, cadmium, mercury, and tin concentrations never varied appreciably. Levels of copper, lead, and zinc in the liquid consistently corresponded to the levels in the spent abrasive. Similarly low values of these metals in the liquid samples occurred when the spent abrasive contained lesser quantities of these three elements.

Leaching Study #5 consisted of treating five different samples of grit and river sediment with river water or deionized water. Some of the experiments involved stirring, while others did not. Chromium levels actually showed a slight decrease in value, indicating again the possibility that the abrasive acts in certain cases as an adsorbent. Copper levels changed very little. Data on leachability of zinc was inconclusive since concentrations of zinc increased in some instances and decreased in others.

There are many inconsistencies in the results of the five leaching studies reviewed. Questions which remain about testing procedures and conflicting data indicate that further study would be beneficial. Doubts exist about the reliability of a leaching test done in a small closed container where dilution and circulation are not factors.

Sieve Analyses of Debris

Sieve analyses were conducted on fresh grit and spent paint and abrasive collected by the contractor at Shipyard B. One sample consisted entirely of fresh abrasive, and the second sample containing spent paint and grit was collected from the drydock floor immediately following blasting. The two samples were analyzed using a standard sieve analysis and the results are shown in Table V-11 and V-12.

Table V-11. GRAIN-SIZE ANALYSIS
OF UNSPENT GRIT (SAMPLE 1)

<u>Sieve</u>	<u>% Retained</u>	<u>% Finer</u>
10	15	85
40	83	2
60	1.8	.2
140	<.1	<.1
200	<.1	<.1
<200	<.1	<.1
	<u>100</u>	

Average specific gravity = 4.617

Table V-12. GRAIN-SIZE ANALYSIS OF
SPENT GRIT AND SPENT PAINT (SAMPLE 2)

<u>Sieve</u>	<u>% Retained</u>	<u>% Finer</u>
10	10	90
40	78	12
60	6	6
140	3	3
200	1	2
<200	<u>2</u>	1
	100	

Average specific gravity = 4.418

The fresh grit, "Black Beauty," was purchased by the company from power plants. The abrasive is actually the slag collected from coal-fired boilers. The principal constituents are iron, aluminum, and silicon oxides (see Table III-3). The spent grit and paint, which were collected following a "very light sand sweep," contained flakes and particles of antifouling and primer paints and bits of iron oxides. The test results indicate that over 95 percent of the particles in each sample were sand size and were retained in U.S.A. Standard Testing sieves numbered 10, 40, 60, and 140, made by Tyler Equipment Co., with the largest fraction retained in sieve number 40. The unspent grit particles were slightly larger and the facets were sharper and more defined. The specific gravities of the two samples did not differ significantly. These sand-size particles were readily settleable.

SECTION VI

SELECTION OF POLLUTION PARAMETERS

INTRODUCTION

Materials originating from shipbuilding and repair activities which may have significance as potential pollutants have been identified during the course of this study. Although an exhaustive list of materials capable of discharge to waterways could be developed, many of these can be eliminated from consideration. The priority pollutants copper, zinc, chromium, and lead have been identified as being present in shipyard facilities under conditions which can result in their discharge. Compounds of these metals are constituents of fresh paints (Tables III-4 and III-5). They persist in the abrasive blasting debris as components of the spent paint and abrasive. The rationale for selection of constituents as pollution parameters or for rejection of others is presented here.

While numerical guidelines and standards are not being recommended at this time, pollution parameters are being identified for consideration by the users of this document and for further investigation, and use where it may be appropriate.

Factors which have been considered in selecting and rejecting pollution parameters include:

- o The degree of polluttional constituents used and discharged from ship repair and construction operations in graving docks and floating drydocks.
- o The need for preventing the introduction of the constituent into the waterway; and
- o The aesthetic effects of the constituent and the effects on other uses of the water.

A list of constituents which may be subject to discharge from graving docks and from floating drydocks is shown in Table VI-1. Pollution parameters have been selected from this list, and this is discussed in the following sections.

Table VI-1. MATERIALS ORIGINATING FROM DRYDOCKS WHICH MAY BE DISCHARGED TO WATERWAYS

<u>Constituents</u>	<u>Source</u>	<u>Comments</u>
Fresh Grit	Spills during transfer and handling	Uncontaminated solid, usually slag, sand, cast iron or steel shot
Blasting Debris	Material removed from ships hull during blasting	Spent grit, marine fouling, spent paint, rust, may contain priority pollutants
Solid Wastes	Repair and Construction Activities	Scrap metal, welding rods, wood, plastics, trash such as paper and food scraps
Fresh Paint	Paint mixing spills, overspray	Overspray may reach dock floor, spills to floor or drains and contains priority pollutants
Oil & Grease Fuel	Spills and leakage from ship and equipment, losses during servicing	Can originate either from vessel or from dock activities
Oil, Grease and Fuel Contaminated Water	Leakage from tank cleaning and ruptured tanks, bilgewater	May contain detergents used in tank cleaning
Solvents, Paint Remover	Paint stripping other than blasting	Not common practice
Boiler Water	Vessel boiler	High quality water, usually not discharged
Cooling Water	Vessel equipment	Supplied by on-shore source, once-through, non-contact
Hydrostatic Leakage	Groundwater leakage into dock	Graving docks only
Gate Leakage	Harbor water	Graving docks only

Materials identified in Table VI-1 may produce other contaminants in water. Their effects are generally measured in terms of parameters such as suspended solids, dissolved solids, BOD and COD, oil and grease, and specific elements or chemical species. Table VI-2 lists specific and nonspecific parameters which are possible pollutants. Analytical methods for monitoring would necessarily include some or all of the items listed in Table VI-2.

Table VI-2. PARAMETERS WHICH MAY BE PRESENT IN
WASTEWATER DISCHARGES FROM DRYDOCKS

<u>Specific Parameters</u>		<u>Non-Specific</u>	
<u>Metals</u>	<u>Non-Metals</u>	<u>Parameters</u>	
Pb Mn -	PO ₄	pH	
Cr As	NO ₂	Total Suspended Solids	
Cu Hg		Settleable Solids	
Sa- Ni		Oil and Grease	
Cd Al			
Zn Fe -			

RATIONALE FOR THE SELECTION OF POLLUTION PARAMETERS

During the course of this study and the sampling program conducted in support of it, it has become evident that a direct cause and effect relationship between activities and materials in the docking facility and constituents in the wastewater does not always exist. In addition, much of the water purposefully used in drydocking operations is harbor water already containing measurable levels of constituents leached from the drainage area supplying the harbor, discharged from other sources, or naturally present in the water. Because of this, the problem of identifying the origin of these constituents, in the presence of sampling and analytical variations, becomes complex.

In selecting pollution parameters two questions have been considered as vital to the proper inclusion of a constituent in this category. The first of these is, "Are the constituents discharged to the environment"? Second, and equally important is, "Is the constituent present in the ship repair and construction facility in a condition capable of creating a hazardous discharge"? If both of these questions can be answered in the affirmative, the constituent should be

considered a potential pollutant requiring monitoring and possibly necessitating controls.

Referring to Table VI-2, the listed metals all may be constituents of the paint used on hulls. The most commonly used anticorrosive paints contain zinc chromate or lead oxide. Antifouling paints in current use usually incorporate cuprous oxide. The use of arsenic and mercury antifouling paints has been discontinued because of their toxicity. Recently, antifouling paints containing organotin compounds have been introduced into practice. These have the advantage of longer life in service but when removed for repainting, like mercury based paints, can be toxic to workers. Three sources of iron exist in the drydocking facility. Steel scrap and waste metal are major sources. Iron from scrap is initially in the metallic form but air and moisture will rapidly produce a surface coat of rust. The second source is iron oxide contained in the paints. The amount of iron oxide in paint is negligible compared to the other paint components and to exposed steel surfaces found in the drydock area. The third source is metallic iron abraded from ships during abrasive blasting and subsequent potential dissolution into water.

Non-metal constituents are phosphates and nitrites. These are added to water in trace quantities during wet blasting to bare metal. They function as rust inhibitors. Their use is infrequent and total quantities are small.

Non-specific parameters which may ultimately be transported to wastewater are also listed in Table VI-2.

Solids content is measured by total solids, suspended and settleable solids, and dissolved solids. Total solids is the total of the suspended and dissolved components. Most of the suspended solids are spent paint and grit from the blasting operations, but may also include dried fresh paint resulting from overspray and spills. Other sources of solids are metal or metal scale particulates resulting from cutting and cleaning work, slag from arc welding, wood and other organic solids particles, etc., all in small quantities. Dissolved solids may be present due to constituents from spent or fresh paint, solution of iron or alloy metals from scrap steel, and solution of components from virtually any solid coming in contact with water.

A measure of the hydrogen ion concentration of water is pH. As such, it can be altered (from the neutral value of 7) to either acidic or basic values by the effects of dissolved materials added to the water.

Oil and grease are measures of the quantity of organic compounds extractable by hexane. This can include not only oils and greases, but also fuel, solvents, and paint components.

The parameters selected as pollutants potentially released by shipyard activities into wastewaters are listed in Table VI-3. These constituents represent materials which are commonly used in drydocking facilities and hence which have potential for release to ambient waters. Although other parameters listed in Table VI-2 have been rejected as pollutants to be regulated at this time, the sampling and analysis program routinely determined the levels of those as well. The basis for rejection is discussed in the subsection on "Rationale for Rejection of Pollution Parameters."

Table VI-3. POLLUTION PARAMETERS

<u>Specific Parameters</u>		<u>Other Metals</u>	<u>Non-Specific Parameters</u>
<u>Priority Pollutants</u>	<u>Non-Metals</u>		
Zn	None	Sn*	Suspended Solids
Cu			Settleable Solids
Pb			Oil and Grease
Cr			pH

*Only where organotin anti-fouling plants may be used or removed from the hull.

It must be emphasized that one of the great uncertainties in establishing pollution parameters arises from the use of harbor water for most of the shipyard operations. Unlike chemical processing plants, where high quality water is used, input water may vary in constituent concentration from fresh lake and river water to saline ocean water, thus the background content of suspended and dissolved components may mask many of the parameters frequently monitored. The following subsections discuss each of the parameters selected as potential pollutants.

Zinc (Zn)

Occurring abundantly in rocks and ores, zinc is readily refined into a stable pure metal and is used extensively as a metal, an alloy, and a plating material. In addition, zinc salts are also used in paint pigments, dyes, and insecticides. Many of these salts (for example, zinc chloride and zinc sulfate) are highly soluble in water; hence, it is expected that zinc might occur in many industrial wastes. On the other hand, some zinc salts (zinc carbonate, zinc oxide, zinc sulfide) are insoluble in water and, consequently, it is expected that some zinc will precipitate and be removed readily in many natural waters.

In soft water, concentrations of zinc ranging from 0.1 to 1.0 mg/l have been reported to be lethal to fish. Zinc is thought to exert its toxic action by forming insoluble compounds with the mucous that covers the gills, by damage to the gill epithelium, or possibly by acting as an internal poison. The sensitivity of fish to zinc varies with species, age, and condition, as well as with the physical and chemical characteristics of the water. Some acclimatization to the presence of the zinc is possible. It has also been observed that the effects of zinc poisoning may not become apparent immediately so that fish removed from zinc-contaminated to zinc-free water may die as long as 48 hours after the removal. The presence of copper in water may increase the toxicity of zinc to aquatic organisms, while the presence of calcium or hardness may decrease the relative toxicity.

A complex relationship exists between zinc concentrations, dissolved oxygen, pH, temperature, and calcium and magnesium concentrations. Prediction of harmful effects has been less than reliable and controlled studies have not been extensively documented.

Concentrations of zinc in excess of 5 mg/l in public water supply sources cause an undesirable taste which persists through conventional treatment. Zinc can have an adverse effect on man and animals at high concentrations.

Observed values for the distribution of zinc in ocean waters vary widely. The major concern with zinc compounds in marine waters is not one of acute lethal effects, but rather one of the long term sublethal effects of the metallic compounds and complexes. From the point of view of acute lethal effects, invertebrate marine animals seem to be the most sensitive organisms tested.

A variety of freshwater plants tested manifested harmful symptoms at concentrations of 10 mg/l. Zinc sulfate has also been found to be lethal to many plants and it could impair agricultural uses of the water.

Copper (Cu)

Copper is an elemental metal that is sometimes found free in nature and is found in many minerals such as cuprite, malachite, azurite, chalcopryrite, and hornite. Copper is obtained from these ores by smelting, leaching, and electrolysis. Significant industrial uses are in the plating, electrical, plumbing, and heating equipment industries. Copper is also commonly used with other minerals as an insecticide and fungicide.

Traces of copper are found in all forms of plant and animal life, and it is an essential trace element for nutrition. Copper is not considered to be a cumulative systemic poison for humans as it is

readily excreted by the body, but it can cause symptoms of gastroenteritis, with nausea and intestinal irritations, at relatively low dosages. The limiting factor in domestic water supplies is taste. Threshold concentrations for taste have been generally reported in the range of 1.0 to 2.0 mg/l of copper while concentrations of 5 to 7.5 mg/l have made water completely undrinkable. It has been recommended that the copper in public water supply sources not exceed 1 mg/l.

Copper salts cause undesirable color reactions in the food industry and cause pitting when deposited on some other metals such as aluminum and galvanized steel. The textile industry is affected when copper salts are present in water used for processing of fabrics. Irrigation waters containing more than minute quantities of copper can be detrimental to certain crops. The toxicity of copper to aquatic organisms varies significantly, not only with the species, but also with the physical and chemical characteristics of the water, including temperature, hardness, turbidity, and carbon dioxide content. In hard water, the toxicity of copper salts may be reduced by the precipitation of copper carbonate or other insoluble compounds. The sulfates of copper and zinc, and of copper and cadmium are synergistic in their toxic effect on fish.

Copper concentrations less than 1 mg/l have been reported to be toxic, particularly in soft water, to many kinds of fish, crustaceans, mollusks, insects, phytoplankton, and zooplankton. Concentrations of copper, for example, are detrimental to some oysters above 0.1 ppm. Oysters cultured in seawater containing 0.13 to 0.5 ppm of copper deposited the metal in their bodies and became unfit as a food substance.

Tin (Sn)

Tin is not present in natural water, but it may occur in industrial wastes. Stannic and stannous chloride are used as mordants for reviving colors, dyeing fabrics, weighting silk, and tinning vessels. Stannic chromate is used in decorating porcelain, and stannic oxide is used in glass works, dye houses, and for fingernail polishes. Stannic sulfide is used in some lacquers and varnishes. Tin compounds are also used in fungicides, insecticides, and anti-helminthics.

No reports have been uncovered to indicate that tin is detrimental in domestic water supplies. Traces of tin occur in the human diet from canned foods, and it has been estimated that the average diet contains 17.14 mg of tin per day. Man can apparently tolerate 850 to 1000 mg per day of free tin in his diet.

On the basis of feeding experiments, it is unlikely that any concentration of tin that could occur in most natural waters would be detrimental to livestock. Most species of fish can withstand fairly

large concentrations of tin; however, tin is about ten times as toxic as copper to certain marine organisms such as barnacles and tubeworms.

While the inorganic compounds of tin are essentially non-toxic at the levels normally encountered, organotin compounds exhibit a high degree of toxicity to specific organisms. These are relatively recent innovations and little experience has been developed in their use.

Due to the potential hazards of organotins to marine environments and in light of the present lack of knowledge concerning the behavior of organotin waste in the environment, abrasive blasting waste containing organotin compounds should be considered pollutants of concern.

Lead (Pb)

Lead is used in various solid forms both as a pure metal and in several compounds. Lead appears in some natural waters, especially in those areas where mountain limestone and galena are found. Lead can also be introduced into water from lead pipes by the action of the water on the lead.

Lead is a toxic material that is foreign to humans and animals. The most common form of lead poisoning is called plumbism. Lead can be introduced into the body from the atmosphere containing lead or from food and water.

Lead cannot be easily excreted and is cumulative in the body over long periods of time, eventually causing lead poisoning with the ingestion of an excess of 0.6 mg per day over a period of years. It has been recommended that 0.05 mg/l lead not be exceeded in public water supply sources.

Chronic lead poisoning has occurred among animals at levels of 0.18 mg/l of lead in soft water and by concentrations under 2.4 mg/l in hard water. Farm animals are poisoned by lead more frequently than any other poison. Sources of this occurrence include paint and water with the lead in solution as well as in suspension. Each year thousands of wild waterfowl are poisoned from lead shot that is discharged over feeding areas and ingested by the waterfowl. The bacterial decomposition of organic matter is inhibited by lead at levels of 0.1 to 0.5 mg/l.

Fish and other marine life have had adverse effects from lead and salts in their environment. Experiments have shown that small concentrations of heavy metals, especially of lead, have caused a film of coagulated mucous to form first over the gills and then over the entire body probably causing suffocation of the fish due to this obstructive layer. Toxicity of lead is increased with a reduction of dissolved oxygen concentration in the water.

Chromium (Cr)

Chromium is an elemental metal usually found as a chromite (FeCr_2O_4). The metal is normally processed by reducing the oxide with aluminum.

Chromium and its compounds are used extensively throughout industry. It is used to harden steel and as an ingredient in other useful alloys. Chromium is also used in the electroplating industry as an ornamental and corrosion resistant plating on steel and can be used in pigments and as a pickling acid (chromic acid).

The two most prevalent chromium forms found in industry wastewaters are hexavalent and trivalent chromium. Chromic acid used in industry is a hexavalent chromium compound which is partially reduced to the trivalent form during use. Chromium can exist as either trivalent or hexavalent compounds in raw waste streams. Hexavalent chromium treatment involves reduction to the trivalent form prior to removal of chromium from the waste stream as a hydroxide precipitate.

Chromium, in its various valence states, is hazardous to man. It can produce lung tumors when inhaled and induces skin sensitizations. Large doses of chromates have corrosive effects on the intestinal tract and can cause inflammation of the kidneys. Levels of chromate ions that have no effect on man appear to be so low as to prohibit determination to date. The recommendation for public water supplies is that such supplies contain no more than 0.05 mg/l total chromium.

The toxicity of chromium salts to fish and other aquatic life varies widely with the species, temperature, pH, valence of the chromium and synergistic or antagonistic effects, especially that of hard water. Studies have shown that trivalent chromium is more toxic to fish of some types than hexavalent chromium. Other studies have shown opposite effects. Fish food organisms and other lower forms of aquatic life are extremely sensitive to chromium and it also inhibits the growth of algae. Therefore, both hexavalent and trivalent chromium must be considered harmful to particular fish or organisms.

Total Suspended Solids (TSS)

Suspended solids include both organic and inorganic materials. The inorganic compounds include sand, silt, and clay. The organic fraction includes such materials as grease, oil, tar, and animal and vegetable waste products. These solids may settle out rapidly and bottom deposits are often a mixture of both organic and inorganic solids. Solids may be suspended in water for a time, and then settle to the bed of the stream or lake. These solids discharged with man's wastes may be inert, slowly biodegradable materials, or rapidly decomposable substances. While in suspension, they increase the

turbidity of the water, reduce light penetration, and impair the photosynthetic activity of aquatic plants.

Suspended solids in water interfere with many industrial processes, cause foaming in boilers, and incrustations on equipment exposed to such water, especially as the temperature rises. They are undesirable in process water used in the manufacture of steel, in the textile industry, in laundries, in dyeing, and in cooling systems.

Solids in suspension are aesthetically displeasing. When they settle to form sludge deposits on the stream or lake bed, they are often damaging to the life in water. Solids, when transformed to sludge deposits, may do a variety of damaging things, including blanketing the stream or lake bed and thereby destroying the living spaces for those benthic organisms that would otherwise occupy the habitat. When of an organic nature, solids use a portion of all of the dissolved oxygen available in the area. Organic materials also serve as a food source for sludgeworms and associated undesirable organisms.

Disregarding any toxic effect attributable to substances leached out by water, suspended solids may kill fish and shellfish by causing abrasive injuries and by clogging gills and respiratory passages of various aquatic fauna. Indirectly, suspended solids are inimical to aquatic life because they screen out light, and they promote and maintain the development of noxious conditions through oxygen depletion. This results in the killing of fish and fish food organisms. Suspended solids also reduce the recreational value of the water.

Oil and Grease

Because of widespread use, oil and grease occur often in wastewater streams. These oily wastes may be classified as follows:

- o Light Hydrocarbons - These include light fuels such as gasoline, kerosene, jet fuel, and miscellaneous solvents used for industrial processing, degreasing, or cleaning purposes. The presence of these light hydrocarbons may make the removal of other heavier oily wastes more difficult.
- o Heavy Hydrocarbons, Fuels, and Tars - These include the crude oils, diesel oils, #6 fuel oil, residual oils, slop oils, and in some cases, asphalt and road tar.
- o Lubricants and Cutting Fluids - These generally fall into two classes: non-emulsifiable oils such as lubricating oils and greases and emulsifiable oils such as water soluble oils, rolling oils, cutting oils, and drawing compounds.

Emulsifiable oils may contain fat soap or various other additives.

- o Vegetable and Animal Fats and Oils - These originate primarily from processing of foods and natural products.

These compounds can settle or float and may exist as solids or liquids depending upon factors such as method of use, production process, and temperature of wastewater.

Oils and grease even in small quantities cause troublesome taste and odor problems. Scum lines from these agents are produced on water treatment basin walls and other containers. Fish and waterfowl are adversely affected by oils in their habitat. Oil emulsions may adhere to the gills of fish causing suffocation, and the flesh of fish is tainted when microorganisms that were exposed to waste oil are eaten. Deposition of oil in the bottom sediments of water can serve to inhibit normal benthic growth. Oil and grease exhibit an oxygen demand.

Levels of oil and grease which are toxic to aquatic organisms vary greatly, depending on the type and the species susceptibility. However, it has been reported that crude oil in concentrations as low as 0.3 mg/l is extremely toxic to freshwater fish. It has been recommended that public water supply sources be essentially free from oil and grease.

Oil and grease in quantities of 100 l/sq km (10 gallons/sq mile) show up as a sheen on the surface of a body of water. The presence of oil slicks prevent the full aesthetic enjoyment of water. The presence of oil in water can also increase the toxicity of other substances being discharged into the receiving bodies of water. Municipalities frequently limit the quantity of oil and grease that can be discharged to their wastewater treatment systems by industry.

Acidity and Alkalinity (pH)

Although not a specific pollutant, pH is related to the acidity or alkalinity of a wastewater stream. It is not a linear or direct measure of either, however, it may be used properly as a surrogate to control both excess acidity and excess alkalinity in water. The term pH is used to describe the hydrogen ion - hydroxyl ion balance in water. pH measures the hydrogen ion concentration or activity present in a given solution. pH numbers are the negative common logarithm of the hydrogen ion concentration. A pH of 7 indicates neutrality or a balance between free hydrogen and free hydroxyl ions. A pH above 7 indicates that the solution is alkaline, while a pH below 7 indicates that the solution is acid.

Knowledge of the pH of water or wastewater is useful in determining necessary measures for corrosion control, pollution control, and disinfection. Waters with a pH below 6.0 are corrosive to water works structures, distribution lines, and household plumbing fixtures and such corrosion can add constituents to drinking water such as iron, copper, zinc, cadmium, and lead. Low pH waters not only tend to dissolve metals from structures and fixtures but also tend to redissolve or leach metals from sludges and bottom sediments. The hydrogen ion concentration can affect the "taste" of the water and at a low pH, water tastes "sour."

Extremes of pH or rapid pH changes can exert stress conditions or kill aquatic life outright. Even moderate changes from "acceptable" criteria limits of pH are deleterious to some species. The relative toxicity to aquatic life of many materials is increased by changes in the water pH. For example, metalocyanide complexes can increase a thousand-fold in toxicity with a drop of 1.5 pH units. Similarly, the toxicity of ammonia is a function of pH. The bactericidal effect of chlorine in most cases is less as the pH increases, and it is economically advantageous to keep the pH close to 7.

Acidity is defined as the quantitative ability of a water to neutralize hydroxyl ions. It is usually expressed as the calcium carbonate equivalent of the hydroxyl ions neutralized. Acidity should not be confused with pH value. Acidity is the quantity of hydrogen ions which may be released to react with or neutralize hydroxyl ions while pH is a measure of the free hydrogen ions in a solution at the instant the pH measurement is made. A property of many chemicals, called buffering, may hold hydrogen ions in a solution from being in the free state and being measured as pH. The bond of most buffers is rather weak and hydrogen ions tend to be released from the buffer as needed to maintain a fixed pH value.

Highly acid waters are corrosive to metals, concrete and living organisms, exhibiting the pollutional characteristics outlined above for low pH waters. Depending on buffering capacity, water may have a higher total acidity at pH values of 6.0 than other waters with a pH value of 4.0.

RATIONALE FOR REJECTION OF POLLUTION PARAMETERS

A number of parameters shown in Table VI-2 have been rejected as pollution parameters. This rejection was based on negative answers to one or both of the questions used to select pollution parameters. Rejected parameters are listed in Table VI-4. A brief discussion of the rejected parameters and the rationale follows.

Table VI-4. PARAMETERS REJECTED AS POLLUTION PARAMETERS

<u>Specific Parameters</u>		<u>Non-Specific Parameters</u>
<u>Metals</u>	<u>Non-Metals</u>	
As	Mn	PO ₄
Hg	Al	NO ₂
Fe		Total Solids
Cd		Dissolved Solids
Ni		COD
		BOD

Arsenic has been rejected because its use in antifouling paints has been discontinued due to toxicity. Mercury also formerly was included as a constituent of antifouling paints. However, on March 29, 1972, the EPA suspended its use in marine paints, and since that use was not subject to appeal (although its use in other paint formulations was appealed), it no longer is found in shipbuilding and repair facilities. If further investigation reveals the presence of arsenic in foreign paints which are subsequently removed in U.S. facilities, then it shall become a selected pollutant.

Iron has been rejected because, except for trace quantities in spent paint both as a pigment component and as rust blasted from the hulls, its presence in shipbuilding and repair facilities is in the form of structural steel, or at levels below immediate concern.

Cd, Ni, and Mn are unlikely constituents to arise from shipyard operations. No uses of these materials in shipyards have been identified. Aluminum may be present but is not considered a significant pollutant. Aluminum in the form of alum is commonly used in water treatment plants.

Phosphates and nitrites have been eliminated. Both are potentially detrimental to natural water bodies, but the only source is from wet blasting to bare metal. In this operation they are added to the water in fractional percentages as rust inhibitors. Wet blasting to bare metal is rarely used in shipyard practice because of the formation of rust on the unpainted surface.

COD and BOD have also been rejected. COD occurs as a result of the presence of reducing chemical compounds in the wastewater. The only reducing chemical species identified are nitrites, and these have been rejected as a parameter. BOD results from biological (sanitary) wastes and is not within the scope of this study.

SECTION VII

TREATMENT AND CONTROL TECHNOLOGY

INTRODUCTION

Treatment and control of shipyard discharges is subject to problems not encountered in most industries. One example is the volume of water involved in graving dock dewatering or raising floating drydocks. Graving dock volumes shown in Table III-8 range from 3.8 million liters (1.0 million gallons) to 246 million liters (65 million gallons). Dewatering may be carried out in four hours or less and at the upper size extreme the flowrate during dewatering would be 60 million liters (16 million gallons) per hour or the equivalent of 476 million liters (390 million gallons) per day. Floating drydocks are open ended, and confinement of volumes of water equivalent to that found in graving docks would make it impossible to raise the dock. Thus, flooding and dewatering operations defy practical wastewater treatment.

There are, however, a number of practices which can potentially benefit the discharges of industrial and other waters from both graving docks and floating drydocks. In the course of this study, these practices, which constitute the treatment and control technology in use or under development, were observed or reported to the contractor by facilities visited or contacted.

Seven facilities were visited and thirty-eight were contacted by telephone. From the information obtained, the treatment and control technology in use basically consists of (1) clean-up procedures in the dock and (2) control of water flows within the dock. The degree to which the available control measures are implemented by any yard depends upon conditions prevailing at the facility, physical constraints within the facility, economic factors, and, to a large extent, management philosophy.

All facilities practice some degree of clean up at various times, although this may consist only of moving debris out of the work area when accumulations interfere with operations. During the docking period, some facilities use extensive clean-up procedures, not only to remove debris prior to flooding, but to eliminate possible contact with gate leakage, hydrostatic water, or rainwater. In general drydock clean up is directed toward improving productivity and safety and toward maintaining acceptable working conditions. Both mechanical and manual methods are in use.

Mechanical clean-up methods used or tried include mechanical sweepers, front loaders, vacuum equipment and closed cycle blasting. Manual methods include shovels, brooms, and hoses.

Control of water flows within the dock, like clean-up procedures, varies with facility. In some cases, no controls of wastewater from either the docked vessel, industrial activities, leakage, or other natural causes are practiced.

Other facilities use methods to control and segregate water flows or have plans to implement such control. Generally, control and segregation of water flows in the dock, when practiced, has been for the same purposes as clean up, i.e., productivity, safety, and improved working conditions. However, recently, particularly in naval facilities, this form of control has the added purpose of eliminating potential discharge of pollutants.

In summary the treatment and control technology being applied or planned for drydocks consists of clean-up procedures and control and segregation of water flows. The objectives of clean-up activities are:

- o To improve productivity by removing physical obstacles and impediments to men and machinery working in the dock.
- o To improve safety by eliminating hazardous materials and conditions from the work area.
- o To improve working conditions by eliminating health (and safety) hazards and factors detrimental to morale.
- o To prevent potential contaminants from being discharged to the atmosphere or waterways.

Where control and segregation of water flows within the docks are in use or planned the objectives are:

- o To segregate sanitary waste, cooling water, industrial wastewaters, and leakages in order to comply with existing regulations governing sanitary wastes.
- o To comply with existing regulations governing oil spills and discharges.
- o To prevent transport of solids to the waterway way and contact of wastewater with debris in the drydock.

Management practices consistant with attaining these objectives have been defined. These represent actions and philosophies which can be

adopted in the normal course of shipyard operations. As such they can be set forth in general terms, and the particular conditions prevailing at each facility will determine the details and methods of implementation. The best management practices are presented below.

The following specific requirements shall be incorporated in NPDES permits and are to be used as guidance in the development of a specific facility plan. Best Management Practices (BMP) numbered 2, 5, 7 and 10 should be considered on a case-by-case basis for yards in which wet blasting to remove paint or dry abrasive blasting do not occur, and BMP 10 does not apply to floating drydocks.

BEST MANAGEMENT PRACTICES (BMP)

BMP 1. Control of Large Solid Materials. Scrap metal, wood and plastic, miscellaneous trash such as paper and glass, industrial scrap and waste such as insulation, welding rods, packaging, etc., shall be removed from the drydock floor prior to flooding or sinking.

BMP 2. Control of Blasting Debris. Clean-up of spent paint and abrasive shall be undertaken as part of the repair or production activities to the degree technically feasible to prevent its entry into drainage systems. Mechanical clean-up may be accomplished by mechanical sweepers, front loaders, or innovative equipment. Manual methods include the use of shovels and brooms. Innovations and procedures which improve the effectiveness of clean-up operations shall be adapted, where they can be demonstrated as preventing the discharge of solids. Those portions of the drydock floor which are reasonably accessible shall be "scraped or broomed clean" of spent abrasive prior to flooding.

After a vessel has been removed from the drydock and the dock has been deflooded for repositioning of the keel and bilge blocks, the remaining areas of the floor which were previously inaccessible shall be cleaned by scraping or broom cleaning prior to the introduction of another vessel into the drydock. The requirement to clean the previously inaccessible areas shall be waived either in an emergency situations or when another vessel is ready to be introduced into the drydock within fifteen (15) hours. Where tides are not a factor, this time shall be eight (8) hours.

BMP 3. Oil, Grease, and Fuel Spills. During the drydocked period oil, grease, or fuel spills shall be prevented from reaching drainage systems and from discharge with drainage water. Cleanup shall be carried out promptly after an oil or grease spill is detected.

- BMP 4. Paint and Solvent Spills. Paint and solvent spills shall be treated as oil spills and segregated from discharge water. Spills shall be contained until clean-up is complete. Mixing of paint shall be carried out in locations and under conditions such that spills shall be prevented from entering drainage systems and discharging with the drainage water.
- BMP 5. Abrasive Blasting Debris (Graving Docks). Abrasive blasting debris in graving docks shall be prevented from discharge with drainage water. Such blasting debris as deposits in drainage channels shall be removed promptly and as completely as is feasible. In some cases, covers can be placed over drainage channels, trenches, and other drains in graving docks to prevent entry of abrasive blasting debris.
- BMP 6. Segregation of Waste Water Flows in Drydocks. The various process wastewater streams shall be segregated from sanitary wastes. Gate and hydrostatic leakage may also require segregation.
- BMP 7. Contact Between Water and Debris. Shipboard cooling and process water shall be directed so as to minimize contact with spent abrasive and paint and other debris. Contact of spent abrasive and paint by water can be reduced by proper segregation and control of wastewater streams. When debris is present, hosing of the dock should be minimized. When hosing is used as a removal method, appropriate methods should be incorporated to prevent accumulation of debris in drainage systems and to promptly remove it from such systems to prevent its discharge with wastewater.
- BMP 8. Maintenance of Gate Seals and Closure. Leakage through the gate shall be minimized by repair and maintenance of the sealing surfaces and proper seating of the gate. Appropriate channelling of leakage water to the drainage system should be accomplished in a manner that reduces contact with debris.
- BMP 9. Maintenance of Hoses, Soil Chutes, and Piping. Leaking connections, valves, pipes, hoses, and soil chutes carrying either water or wastewater shall be replaced or repaired immediately. Soil chute and hose connections to the vessel and to receiving lines or containers shall be positive and as leak free as practicable.
- BMP 10. Water Blasting, Hydroblasting, and Water-Cone Abrasive Blasting (Graving Docks). When water blasting, hydroblasting, or water-cone blasting is used in graving docks to remove paint from surfaces, the resulting water and

debris shall be collected in a sump or other suitable device. This mixture then will be either delivered to appropriate containers for removal and disposal or subjected to treatment to concentrate the solids for disposal and prepare the water for reuse or discharge.

CURRENT TREATMENT AND CONTROL TECHNOLOGIES

Most of the current efforts toward water pollution control in both graving docks and floating drydocks are derived from the recommendations of the rationale for shipbuilding and ship repair facilities published by the Denver branch of EPA's National Field Investigations Center in 1974, (Reference 2), after observing the practices in effect in some shipyards. That document emphasized the segregation of wastewaters and general housekeeping practices. It was recommended that all water flows be intercepted or otherwise controlled in order to prevent contact with spent paint and abrasive and other solid materials on the drydock floor. Procedures for handling particular water flows, cooling water, hydrostatic relief water, gate leakage, and air scrubber water were specified. Miscellaneous trash was to be eliminated through "the diligent use of waste receptacles or a thorough clean up...prior to flooding." Clean up of the drydock floor to "broom clean conditions" prior to each undocking was recommended.

Many of the shipyards contacted or visited during the course of this study have made efforts to comply with these recommendations. Their efforts fall into two general areas (as set forth in Table VII-1):

- o Clean up of abrasive
- o Control of wastewater flows

The extent to which particular treatment and control technologies were found to exist during the contact and visit phase of this study are shown in Table VII-2.

The following paragraphs describe observed sequences of the drydock treatment and control technologies listed in Table VII-3. It should be noted that certain of these processes and technologies are designed to reduce or eliminate effluents in drainage pump discharges and overboard flows from floating drydocks. Others are effective on the much larger discharges which occur during deflooding and sinking. The next few pages document procedures for the clean-up of spent abrasive and other solid drydock debris at seven shipyards which were visited and observed (labeled shipyards A through G) as well as procedures for handling cooling water discharges.